



REGIONAL WATER QUALITY CONTROL BOARD,
CENTRAL VALLEY REGION

**Sulphur Creek
TMDL for Mercury**

Final Staff Report

January 2007



CALIFORNIA ENVIRONMENTAL PROTECTION AGENCY

State of California
California Environmental Protection Agency
REGIONAL WATER QUALITY CONTROL BOARD
CENTRAL VALLEY REGION

Karl E. Longley, Chair
Kate Hart, Vice Chair
Paul Betancourt, Member
Christopher Cabaldon, Member
Cheryl K. Maki, Member
Sandra O. Meraz, Member
Soapy Mulholland, Member
Dan Odenweller, Member

Pamela Creedon, Executive Officer

11020 Sun Center Drive #200
Rancho Cordova, California 95670-6114

Phone: (916) 464-3291

DISCLAIMER

*This publication is a technical report by staff of the
California Regional Water Quality Control Board, Central Valley Region.
No policy or regulation is either expressed or intended.*

REGIONAL WATER QUALITY CONTROL BOARD
CENTRAL VALLEY REGION

CALIFORNIA ENVIRONMENTAL PROTECTION AGENCY

Sulphur Creek TMDL for Mercury
Final Staff Report

January 2007

REPORT PREPARED BY:

JANIS COOKE, Ph. D.
Environmental Scientist

And

STACY STANISH
Environmental Scientist

This page intentionally left blank

SULPHUR CREEK MERCURY TMDL

EXECUTIVE SUMMARY

The Central Valley Regional Water Quality Control Board has determined that Sulphur Creek (Colusa County) is impaired due to elevated levels of mercury. Because of this impairment, Staff has prepared a Total Maximum Daily Load (TMDL) water quality management strategy. The Sulphur Creek TMDL includes: water quality numeric targets, assessment of mercury sources, linkage between the numeric target and loads, allocation of acceptable loads, a margin of safety, and an implementation plan. The goal of this TMDL is to lower mercury and methylmercury levels in Sulphur Creek such that loads of mercury entering Bear Creek are reduced and beneficial uses of Sulphur Creek and downstream water bodies are protected. The TMDL Report and associated Basin Plan Amendments satisfy TMDL requirements for lower Sulphur Creek, which is the approximately two-mile reach between the Schoolhouse Canyon and the confluence with Bear Creek. The load allocations and implementation plan address mines and mercury-enriched soil in the upper watershed as well.

Mercury Sources

Sources of mercury entering the watershed include waste rock, ore and tailings from historic mercury mines, geothermal springs, erosion of mineralized and non-mineralized (background) soil, and atmospheric deposition. There are six inactive mines in the lower Sulphur Creek watershed and at least two inactive mines in the upper watershed that contribute mercury to the creek. The streambed and banks are contaminated with mine tailings and waste rock, which contribute mercury to the creek as they erode. Multiple geothermal springs discharge to the creek, including some within the creek bed.

Mercury is transformed to methylmercury in sediment by sulfate-reducing bacteria. Sources of methylmercury include in-channel production, direct geothermal discharge, and drainage from the interaction of geothermal water with mine wastes.

Sulphur Creek was sampled during winter storms and non-storm events between 1998 and 2004. At the flow gauge near the confluence with Bear Creek, total mercury concentrations (unfiltered) ranged between 245 and 16,411 ng/L, with an average of 2764 ng/L. Methylmercury concentrations (unfiltered) at the gauge averaged 3 ng/L with a range of 0.06 to 20 ng/L. Average, annual loads of total mercury and methylmercury were 12 kg/year and 8 g/year, respectively. Most mercury in Sulphur Creek is transported during storms and associated runoff. The years of study are not classified as “wet” years. Larger or more frequent storm events could remobilize and transport even larger mercury loads. On an average annual basis, Sulphur Creek contributed 48% of the mercury and 41% of the methylmercury loads to Bear Creek.

Concentrations of mercury and suspended solids were sampled at multiple sites in the watershed on six occasions. These data were used to develop load estimates for tributaries and sub-watersheds of Sulphur Creek. Tributaries associated with mines (Clyde, Elgin, Empire and Wide

Awake Mines) contribute 44% of the mercury loads measured at the gauge. The upper watershed provides about 10% of the loads, which are from contaminated in-stream sediment, erosion of background soil, and unidentified geothermal springs. Mercury loads in lower Sulphur Creek between West End mine and Wilbur Hot Springs account for 56% of the total loads. Sources in this area include geothermal springs, contaminated stream sediment, and erosion from mines.

Numeric Targets for Mercury

This TMDL sets forth numeric targets for mercury in water and sediment based on natural or background concentrations. These targets should protect all wildlife, aquatic life, stock watering and human contact and non-contact recreational beneficial uses of Sulphur Creek. Fish or other organisms consumable by humans have not been observed in the creek. Staff proposes that the Central Valley Water Board adopt these targets as site-specific water quality objectives.

Mercury concentrations vary with flow. In summer and fall, creek flow is typically low and contains high concentrations of mercury from thermal springs. Under low flow conditions (defined as less than three cubic feet per second), the target is the maximum concentration of mercury in Sulphur Creek water of 1,800 ng/L, unfiltered. In winter and spring, the creek also contains mercury from runoff. The high flow target is the concentration of mercury in suspended sediment that is expected to be present in the creek when discharges from the mine sites are controlled. Because the most contaminated soil comes from the mine sites, control of runoff at these sites will decrease the overall level of mercury in creek sediment. The high flow target is 35 mg/kg mercury in fine-grained sediment and is represents as the ratio of concentration of mercury to concentration of suspended sediment in water, or mercury/suspended sediment ratio. This target is calculated by applying the expected reduction in mercury loads (75% through load allocations) to the maximum mercury to suspended sediment ratio.

Linkage Analysis

Methylmercury production is controlled by multiple factors, with a primary factor being inorganic mercury concentrations in sediment. Studies conducted in the Cache Creek watershed and elsewhere have shown statistically significant relationships between methyl and total mercury, where methylmercury in sediment is a function of its total mercury content. This pattern is also seen in Sulphur Creek. Total mercury loads enter Sulphur Creek, which result in increased instream methylmercury production. As a consequence, Sulphur Creek exports considerable loads of mercury and methylmercury to Bear Creek. Reducing total mercury loads from identified sources will lead to reduced methylmercury loads in Sulphur and Bear creeks.

Load Reductions and Implementation Plan

Sulphur Creek is assigned load allocations for total mercury and methylmercury. The load allocations and implementation plan were adopted by the Central Valley Water Board as part of the implementation plan for control of mercury in the Cache Creek watershed.

This TMDL identifies the reductions in total mercury loads needed to eliminate inputs related to mining and other anthropogenic activities and restore the watershed to its estimated pre-mining conditions. Geothermal springs are considered to be natural sources of mercury. Inactive mine sites are allocated 5% of existing mine-related loads entering the creek from each site.

Table ES.1 Sulphur Creek Total Mercury Budget by Source Type and Load Limits

Source	Current Load, kg/yr (a)	Load Allocations as percent of existing loads (b)	Future Load, based on current load estimates, kg/yr
Geothermal springs	1.4	100%	1.4
Non-mine site erosion	1.2	85%	1.0
Clyde Mine	0.4	5%	0.02
Elgin Mine	2.7	5%	0.13
Wide Awake Mine	0.8	5%	0.04
Lower Watershed Mines plus contaminated stream bed	5.3	5%	0.3
Atmospheric Deposition	0.03	100%	0.03
Sum	11.8	25%	2.9
(a) Based on data collected in 2000-2004.			
(b) Load allocations are expressed as a percentage of existing loads. For average water years, a comparison between current and future loads is given.			

Sulphur Creek is also assigned a methylmercury allocation of 10% of existing loads, which is equivalent to an average of 0.8 g methylmercury/year. Methylmercury loads are expected to vary naturally by flow and other factors. The Sulphur Creek methylmercury allocation was calculated to meet methylmercury objectives in fish tissue in Bear Creek.

The goals of the implementation plan are to reduce the mercury concentration in sediment within Sulphur Creek and to reduce the loads of mercury and methylmercury discharged to Bear Creek. Components of the implementation program are:

- 1) Reduce total mercury discharges from the mercury mine sites;
- 2) Reduce the concentration of mercury in Sulphur Creek sediment adjacent to and downstream of the mercury mines; and
- 3) Control erosion of contaminated sediments within the Sulphur Creek watershed where the total mercury sediment concentrations are greater than 0.4 mg/kg, dry weight.

Margin of Safety

The margin of safety for total mercury is implicit in the load allocations. The total mercury load allocations are established to return the watershed to pre-mining conditions. Beyond eliminating the mercury loads related to anthropogenic activities, no additional margin of safety for total mercury is necessary. The methylmercury allocation for Sulphur Creek contains a margin of safety of 10% of acceptable loads.

Basin Planning

The Sulphur Creek TMDL is enacted when amended into the Water Quality Control Plan for the Central Valley Region (Basin Plan). The Central Valley Water Board considers adoption of amendments to the Basin Plan after a public review process. Basin Planning for the Sulphur Creek TMDL occurred in two parts.

Basin Planning Part 1. Staff combined mercury reduction in Sulphur Creek with mercury strategies for Cache Creek, Harley Gulch and Bear Creek in one Basin Plan Amendment that includes load allocations and an implementation plan for all four water bodies. The Central Valley Water Board adopted the Cache Creek Watershed Mercury Basin Plan Amendment in October 2005. The State Water Resources Control Board and State Office of Administrative Law approved the amendment in 2006. Documents for this planning process are available at: <http://www.waterboards.ca.gov/centralvalley/programs/tmdl/Cache-SulphurCreek/index.html>.

Basin Planning Part 2. Water quality objectives for mercury in fish tissue adopted in Basin Plan Amendment for the Cache Creek Watershed do not apply to Sulphur Creek because the creek does not support fish. Applicable human health criteria for drinking water, however, are not attained in Sulphur Creek because of naturally occurring concentrations of mercury and total dissolved solids. The second Basin Plan Amendment will modify the beneficial uses and set site-specific water quality objectives for Sulphur Creek based on naturally occurring concentrations of mercury. The load allocations described in this report are intended to meet the site-specific objectives. Adoption of the second Basin Plan Amendment will complete the federal requirements for a TMDL for Sulphur Creek.

TABLE OF CONTENTS

Executive Summary	i
Table of Contents	v
List of Appendices	vi
List of Tables	vii
List of Figures	vii
List of Acronyms.....	viii
1 Problem Statement.....	1
1.1 TMDL Scope	1
1.2 Regulatory Background	1
1.2.1 Clean Water Act 303(d) Listing and Total Maximum Daily Load Development	1
1.2.2 Porter-Cologne Basin Plan Amendment Process.....	2
1.3 Units and Terms Used in this Report	3
1.4 Watershed Characteristics	3
1.5 Mercury Sources in the Sulphur Creek Watershed.....	4
1.6 Toxicity of Mercury.....	7
1.6.1 Mercury Accumulation in Biota.....	7
1.6.2 Human Health	8
1.6.3 Wildlife Health.....	8
1.7 Beneficial Uses and Applicable Standards.....	8
1.7.1 Beneficial Uses	8
1.7.2 Water Quality Objectives.....	9
1.8 Available Monitoring Data.....	11
1.8.1 Fish Tissue Data.....	11
1.8.2 Water Data	12
2 Source Analysis	13
2.1 Introduction	13
2.2 Water Budget.....	13
2.3 Mercury Sources Entering Sulphur Creek	15
2.3.1 Mass Balance of Mercury in the Sulphur Creek Watershed	15
2.3.2 Mercury in Runoff	18
2.3.3 Instream Sediment Mercury Concentrations.....	19
2.3.4 Mercury to Suspended Sediment Ratio.....	21
2.3.5 Sulphur Creek Baseline Flows and Loads – Geothermal Input	22
2.3.6 Atmospheric Deposition	23
2.4 Comparison Estimates of Total Mercury Loads	24
2.4.1 Mercury loads at the USGS stream gauge	24
2.4.2 Mercury samples collected using a Sigma Autosampler	25
2.5 Methylmercury Exports from Sulphur Creek	25
3 Numeric Target.....	26

3.1	Definition of a Numeric Target	26
3.2	Uses of Sulphur Creek.....	26
3.3	Numeric Targets	28
3.3.1	Justification for Proposal of a Natural Background Target	28
3.3.2	Low Flow Aqueous Mercury Target.....	29
3.3.3	High Flow Sediment Mercury Target	29
3.4	Potential Cleanup Goal for Soil from Mineralized Zones	30
3.5	Numeric Target Summary	31
4	Linkage Analysis	32
4.1	Methylmercury Production.....	32
4.1.1	Sulfate in the Mercury Cycle	32
4.1.2	Sediment Mercury Concentrations.....	33
4.1.3	Mercury Forms.....	33
4.2	Mercury Mobilization by Mine Drainage.....	34
4.3	Mercury Control Programs	34
4.4	Linkage Analysis Summary.....	35
5	Load Allocations.....	36
5.1	Assessment of Mercury Loads by Source Type.....	36
5.2	Allocations for Total Mercury Loads	37
5.3	Methylmercury Loads.....	39
6	Margin of Safety and Seasonal Variability	40
6.1	Margin of Safety.....	40
6.2	Seasonal Variability.....	40
7	Implementation Plan	42
7.1	Mercury Mines.....	43
7.2	Erosion Control	44
7.3	Geothermal Sources.....	45
7.4	Atmospheric Inputs.....	46
8	Public Participation.....	47
9	References.....	49

LIST OF APPENDICES

Appendix A	Flow Data	A-1
Appendix B	Sulphur Creek Watershed Sampling Data.....	B-1
Appendix C	Sulphur Creek Watershed Mercury Load Calculations	C-1
Appendix D	Geothermal Spring Data.....	D-1
Appendix E	Atmospheric Deposition Load Estimates	E-1
Appendix F	Total Mercury, Methylmercury, TSS, and HG/TSS Concentrations in Water Samples Collected at the USGS Stream Gauge.....	F-1
Appendix G	Sigma Autosampler Data	G-1
Appendix H	Evidence of Impairment for Placement on the 303(d) List	H-1

LIST OF TABLES

Table ES.1 Sulphur Creek Total Mercury Budget by Source Type and Load Limits.....	iii
Table 1.1 Existing and Potential Beneficial Uses of Cache Creek	9
Table 1.2 Mercury in Sulphur Creek Water Samples	12
Table 2.1 Annual Flow Measured at USGS Gauge	14
Table 2.2 Sulphur Creek Mercury Loads	15
Table 2.3 Mercury Loads from Mine Sites, Background Soil, and Mineralized Areas	18
Table 2.4 Annual Low Flow Mercury Loads As A Method to Estimate Thermal Spring Inputs.....	22
Table 2.5 Site Specific Mercury Loads from Geothermal Springs	23
Table 2.6 Sulphur Creek Methylmercury Loads	25
Table 5.1 Sulphur Creek Total Mercury Budget by Source Type and Load Allocations	38
Table 5.2. Sulphur Creek Methylmercury Allocation.....	39
Table 7.1 Implementation Activities for Reducing Mercury in Sulphur Creek.....	42
Table A.1 Estimated Flow at Sampling Sites Based Relative Area to USGS Stream Gauge Recorded Data.....	A-1
Table B.1 Total Mercury, Methylmercury, TSS and Hg/TSS Data	B-1
Table C.1 Estimated Mercury Loads from Tributaries and Sub-watersheds within the Sulphur Creek Watershed (kg/yr)	C-1
Table D.1 Data Collected at Sulphur Creek Geothermal Springs.....	D-1
Table E.1 Atmospheric Deposition of Mercury to Surface of Sulphur Creek	E-2
Table F.1 Data Collected at the USGS Stream Gauge.....	F-1
Table F.2 Summary Data for Water Samples Collected at the USGS Stream Gauge	F-2
Table G.1 Sigma Autosampler Data	G-1

LIST OF FIGURES

Figure 1.1 Cache Creek Watershed.....	5
Figure 1.2 Sulphur Creek Watershed.....	6
Figure 1.3. Lower Sulphur Creek, from Schoolhouse Canyon to the Mouth.	7
Figure 1.4 Mercury Cycling Conceptual Model	10
Figure 2.1 Sulphur Creek Sub-watershed and Tributary Loads (kg/yr).....	16
Figure 2.2 Fine Sediment Instream Mercury Concentrations in the Upper Watershed of Sulphur Creek.	20
Figure 2.3 Fine Sediment Instream Mercury Concentrations in the Lower Watershed of Sulphur Creek.	20
Figure 2.4 Mercury to TSS Ratios Compared to Flow During One Storm Event in Sulphur Creek.....	21
Figure 2.5 Total Mercury Concentrations Compared to Flow in Sulphur Creek Collected by a Sigma Autosampler.	25
Figure 2.6 Total Mercury Loads Compared to Flow in Sulphur Creek Collected by a Sigma Autosampler.....	25
Figure A.1 Daily Average Flow (cfs) at the USGS Gauge for Four Water Years.....	A-2
Figure B.1 Watershed-Wide Samples Collected in Sulphur Creek During Storm Events	B-2
Figure F.1 Mercury Concentration and Flow Relationship at the Sulphur Creek Gauge	F-2

Figure G.1 Autosampler: Total Mercury and Flow RelationshipG-2
 Figure G.2 Autosampler: Total Mercury Concentrations over Time.....G-2
 Figure G.3 Autosampler: TSS Concentration and Flow Relationship.....G-2
 Figure G.4 Autosampler: TSS Concentrations over Time.....G-2
 Figure G.5 Autosampler: Total Mercury and TSS Relationship.....G-2
 Figure G.6 Autosampler: THg/TSS Concentrations over TimeG-2

LIST OF ACRONYMS

303(d) List	Clean Water Act 303(d) List of Impaired Water
Basin Plan	Water Quality Control Plan for the Central Valley
BMP	Best Management Practices
Central Valley WaterBoard	Central Valley Regional Water Quality Control Board
CTR	California Toxics Rule
CWA	Federal Clean Water Act
DFG	California Department of Fish and Game
DTMC	Delta Tributaries Mercury Council
Hg	Mercury
Hg/TSS	Mercury to total suspended solids ratio
MeHg	Methylmercury
mg/kg	Milligrams/kilogram
NPDES	National Pollutant Discharge Elimination System
NRC	National Research Council
SBMM	Sulphur Bank Mercury Mine
State Water Board	State Water Resources Control Board
THg	Total Mercury
TMDL	Total Maximum Daily Load
TMDL Report	Sulphur Creek TMDL for Mercury
UC Davis	University of California-Davis
USBLM	U.S. Bureau of Land Management
USEPA	U.S. Environmental Protection Agency
USFWS	U.S. Fish and Wildlife Service
USGS	U.S. Geological Survey

1 PROBLEM STATEMENT

1.1 TMDL Scope

The Central Valley Regional Water Quality Control Board (Central Valley Water Board) has determined that Sulphur Creek (Colusa County) is impaired by mercury. Concentrations of mercury in water of Sulphur Creek exceed the California Toxics Rule mercury criterion for protection of human health. In addition, stream macroinvertebrates have elevated mercury levels. Sulphur Creek is on the federal 303(d) list of impaired water bodies. The federal Clean Water Act (CWA) requires states to identify impaired water bodies and to develop programs to correct the impairments through the Total Maximum Daily Load (TMDL) program. This report describes the TMDL for Sulphur Creek.

This TMDL addresses the mercury impairment of lower Sulphur Creek, which is the approximately two-mile reach between Schoolhouse Canyon and the confluence of Sulphur Creek with Bear Creek. Although the 1998 303(d) List describes all of Sulphur Creek as impaired (7 miles impaired of 7 miles total), all of the data used in the listing were collected within lower Sulphur Creek (Appendix H; SWRCB, 1999). During the 2008 303(d) List preparation process, staff will review available data to determine the extent of impairment in the upper watershed.

The Sulphur Creek site-specific water quality objectives and modification of beneficial uses also apply to lower Sulphur Creek. Meeting the objectives requires that levels of mercury in suspended sediment in the creek be decreased. Because discharges from mines in the upper watershed affect mercury loads and concentrations in lower Sulphur Creek, the implementation plan for the TMDL covers the entire watershed.

1.2 Regulatory Background

1.2.1 Clean Water Act 303(d) Listing and Total Maximum Daily Load Development

Section 303(d) of the Federal Clean Water Act requires states to:

1. Identify those waters not attaining water quality standards (referred to as the “303(d) list”).
2. Set priorities for addressing the identified pollution problems.
3. Establish a “Total Maximum Daily Load” for each identified water body and pollutant to attain water quality standards.

The 303(d) list for the Central Valley is prepared by the Central Valley Water Board and the State Water Resources Control Board (State Water Board) and approved by the federal Environmental Protection Agency (USEPA). Water bodies on the 303(d) list do not meet water quality objectives even if dischargers of point sources comply with current discharge permits.

A TMDL represents the maximum load of a pollutant that a water body can assimilate and not result in impairments. A TMDL describes the reductions needed to meet water quality objectives and allocates those reductions among the sources in the watershed. TMDLs include the following elements: description of the problem (Section 1), analysis of current loads (Section 2), numerical water quality target (Section 3), analysis of the linkage between mercury levels and targets (Section 4), load reductions needed to eliminate impairments (Section 5), margin of safety and seasonal variation (Section 6), implementation plan to achieve the needed load reductions (Section 7), and a public participation record (Section 8).

1.2.2 Porter-Cologne Basin Plan Amendment Process

The Porter-Cologne Water Quality Control Act (Section 13240) requires that the Central Valley Water Board develop a water quality management strategy for each water body and pollutant in the Central Valley that is not meeting its beneficial uses. The water quality management strategy for Sulphur Creek includes elements of the Sulphur Creek TMDL and an implementation plan. The Sulphur Creek TMDL must be amended into the Water Quality Control Plan for the Central Valley Region (Basin Plan). The Basin Plan is a legal document adopted by the Central Valley Water Board that describes beneficial uses of waters, water quality objectives to protect those uses, and a program of implementation needed for achieving the objectives (CVRWQCB, 1998). The water quality management strategy for Sulphur Creek will include several phases:

TMDL Development involves the technical analysis of the sources of pollutant, the fate and transport of those pollutants, the numeric target(s), and the amount of pollutant reduction that is necessary to attain the target. (August 2004)

Basin Planning focuses on the development of a Basin Plan amendment with environmental document for consideration by the Central Valley Water Board. The environmental document includes information and analyses required to comply with the California Environmental Quality Act. Development of the implementation options involves evaluation of remediation and best management practices, the identification of potentially responsible parties and implementation framework (e.g., waste discharge requirements), a time schedule, and a consideration of cost.

Basin Planning for mercury in Sulphur Creek is occurring in two steps. The Basin Plan Amendment for Mercury in the Cache Creek Watershed included an implementation plan to reduce mercury and methylmercury loads in Sulphur Creek and was adopted by the Central Valley Water Board in October 2005. Because load reduction strategies for Sulphur Creek are similar to those needed in other parts of the Cache Creek watershed, it was efficient to include load allocations and the implementation plan for Sulphur Creek in the amendment for the Cache Creek watershed. Specific to Sulphur Creek, though, is adoption of water quality objectives that reflect natural background levels of mercury, which is contributed by thermal springs and undisturbed soil. Water quality objectives for Sulphur Creek are established with a second amendment and environmental analysis.

Implementation focuses on the performance of the cleanup activities and other actions as described in the implementation plan to achieve the TMDL targets. Guidance for

implementation practices is provided by the Porter Cologne Water Quality Act (§13241 and §13242) and the Federal TMDL requirements (CWA Section 303(d)).

The Basin Plan amendment is legally applicable once it has been adopted by the Central Valley Water Board and approved by the State Water Board, State Office of Administrative Law, and the USEPA. Central Valley Water Board staff sought public input throughout TMDL development. Basin Plan amendments are adopted under a structured process involving public workshops, hearings and other opportunities for public participation and environmental review.

1.3 Units and Terms Used in this Report

In this document, aqueous concentrations of mercury and methylmercury are reported in units of nanograms per liter (ng/L). Concentrations of suspended sediment are analyzed as total suspended solids (TSS) and use units of milligrams per liter (mg/L). The concentration of mercury in suspended sediment is the ratio of concentrations of mercury to suspended sediments (Hg/TSS) and is reported as mg/kg. Units for the concentration of mercury in suspended sediment and soil are ng/mg or mg/kg on a dry weight basis.

The units for loads of methylmercury and mercury are grams per year (gm/yr) and kilograms per year (kg/yr), respectively. Sediment loads are given in terms of millions of kilograms per year (kg/yr x 10⁶). Water flow is presented in units of acre-feet per year for annual rates and cubic feet per second (cfs) for instantaneous flow measurements. Mine waste pile and sediment volumes are expressed in cubic yards (cy).

1.4 Watershed Characteristics

Sulphur Creek drains a 6543-acre watershed within the Cache Creek basin, in the Coast Range of California (Figure 1; USGS, 1991). Sulphur Creek is an intermittent stream with continuous flows between the fall and spring months (October through June). Stretches of the stream are wet throughout the year because of inputs from springs. Watershed land use is predominantly rangeland in undeveloped chaparral and California scrub oak (Foe and Croyle, 1998).

The nearest rain gauge to Sulphur Creek is at the Indian Valley Reservoir. Precipitation at the reservoir between the 1996 and 2001 water years averaged 25 inches per year; however, precipitation exceeded 45 inches in an above-average wet year. The majority of rain typically falls between November and March. During the winter, snow occasionally falls in the mountains above the 3,000-foot elevation. Mean annual temperatures for the region are 62 degrees Fahrenheit (°F), with summer temperatures exceeding 100°F and winter temperatures dropping below freezing.

The U.S. Geological Survey (USGS) has mapped numerous springs discharging in the area (Barnes *et al.*, 1975). A shallow magma chamber beneath the Geysers-Clear Lake area is the source of geothermal activity and springs in the Sulphur Creek watershed. Several thrust faults underlie the watershed (Percy and Petersen, 1990). Identifiable geothermal springs discharging to Sulphur Creek include the Jones Fountain of Life (Jones Fountain), Blanck Springs, Elbow

Springs, Elgin Spring, and the Wilbur Hot Springs. Jones Fountain is a geysiring spring near the edge of Sulphur Creek that erupts approximately every twenty minutes. The Wilbur Hot Spring system, also located near the edge of Sulphur Creek, supports a commercial resort and spa. Wilbur Hot Spring water is piped by gravity flow through the resort baths and a pool. All named springs except Elgin Spring are downstream of Schoolhouse Canyon and drain directly to lower Sulphur Creek.

Part of the Sulphur Creek watershed is privately owned. The U.S. Bureau of Land Management (USBLM) administers land in the upper portion of the watershed. Cattle graze on some private property in the lower watershed. The Wilbur Hot Springs resort is the year-round home to about seven people. There are no other year-round residences in the watershed.

1.5 Mercury Sources in the Sulphur Creek Watershed

The Sulphur Creek watershed lies within region naturally enriched in mercury. The volcanism and faulting in the area produced mercury, gold and sulfur deposits that were mined at various periods between 1860 and 1970. Sources of mercury entering Sulphur Creek include excavated overburden, ore and tailings from historic mining operations; erosion of naturally mercury-enriched soils in the mineralized zone; geothermal springs; erosion of soil with background levels of mercury; runoff and emissions from historic mine facilities, and atmospheric deposition. The Sulphur Creek mining district includes six inactive mines (Central, Empire, Wide Awake, Cherry Hill, West End, and Manzanita) in the lower watershed and two inactive mines (Clyde and Elgin) mines in the upper watershed. The East Branch Sulphur Creek may also receive discharge from the Rathburn and Rathburn-Petray mines in the Bear Creek watershed.

Sulphur Creek contributes significant amounts of mercury to Bear Creek. During three storm flow events between January 1997 and February 1998, Staff collected water samples from the mouth of Sulphur Creek and from locations up and downstream of the tributary input to ascertain whether the tributary enhanced or diluted mercury concentrations in Bear Creek (Foe and Croyle, 1998). During two surveys, mercury concentrations in Sulphur Creek increased downstream concentrations in Bear Creek four to six fold. The source analysis prepared for the Bear Creek TMDL showed that, on an average annual basis, Sulphur Creek contributed 48% of the mercury and 41% of the methylmercury loads to Bear Creek (CVRWQCB, 2004).

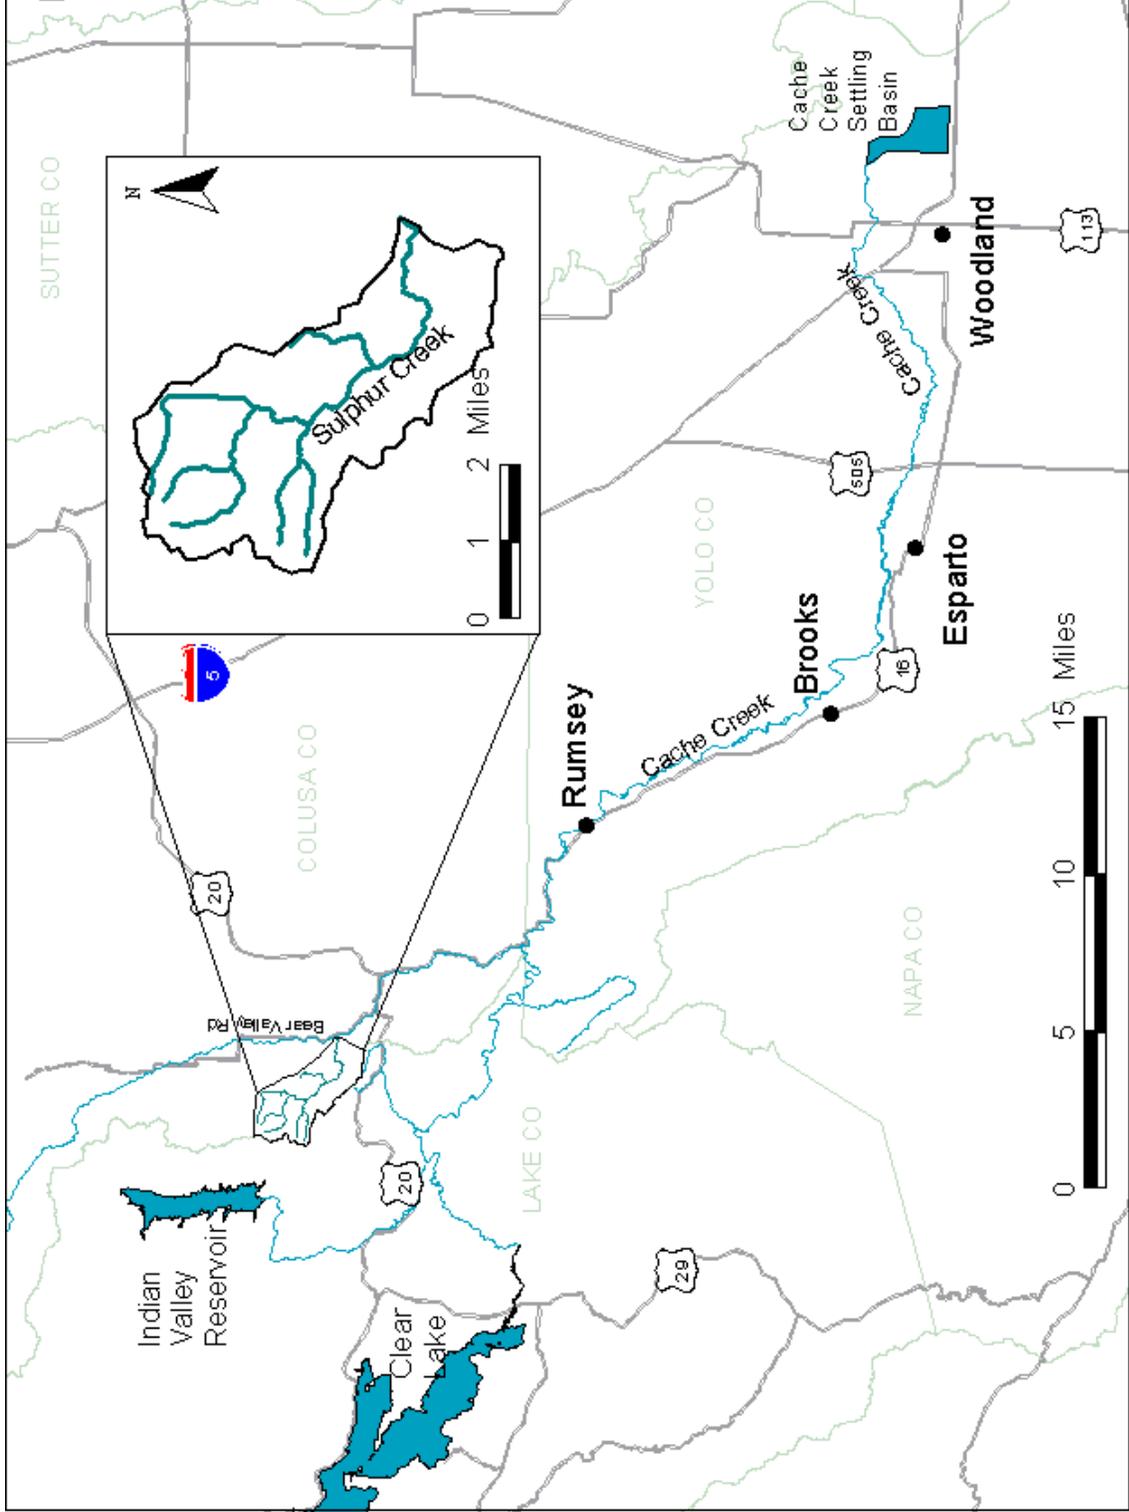


Figure 1.1 Cache Creek Watershed

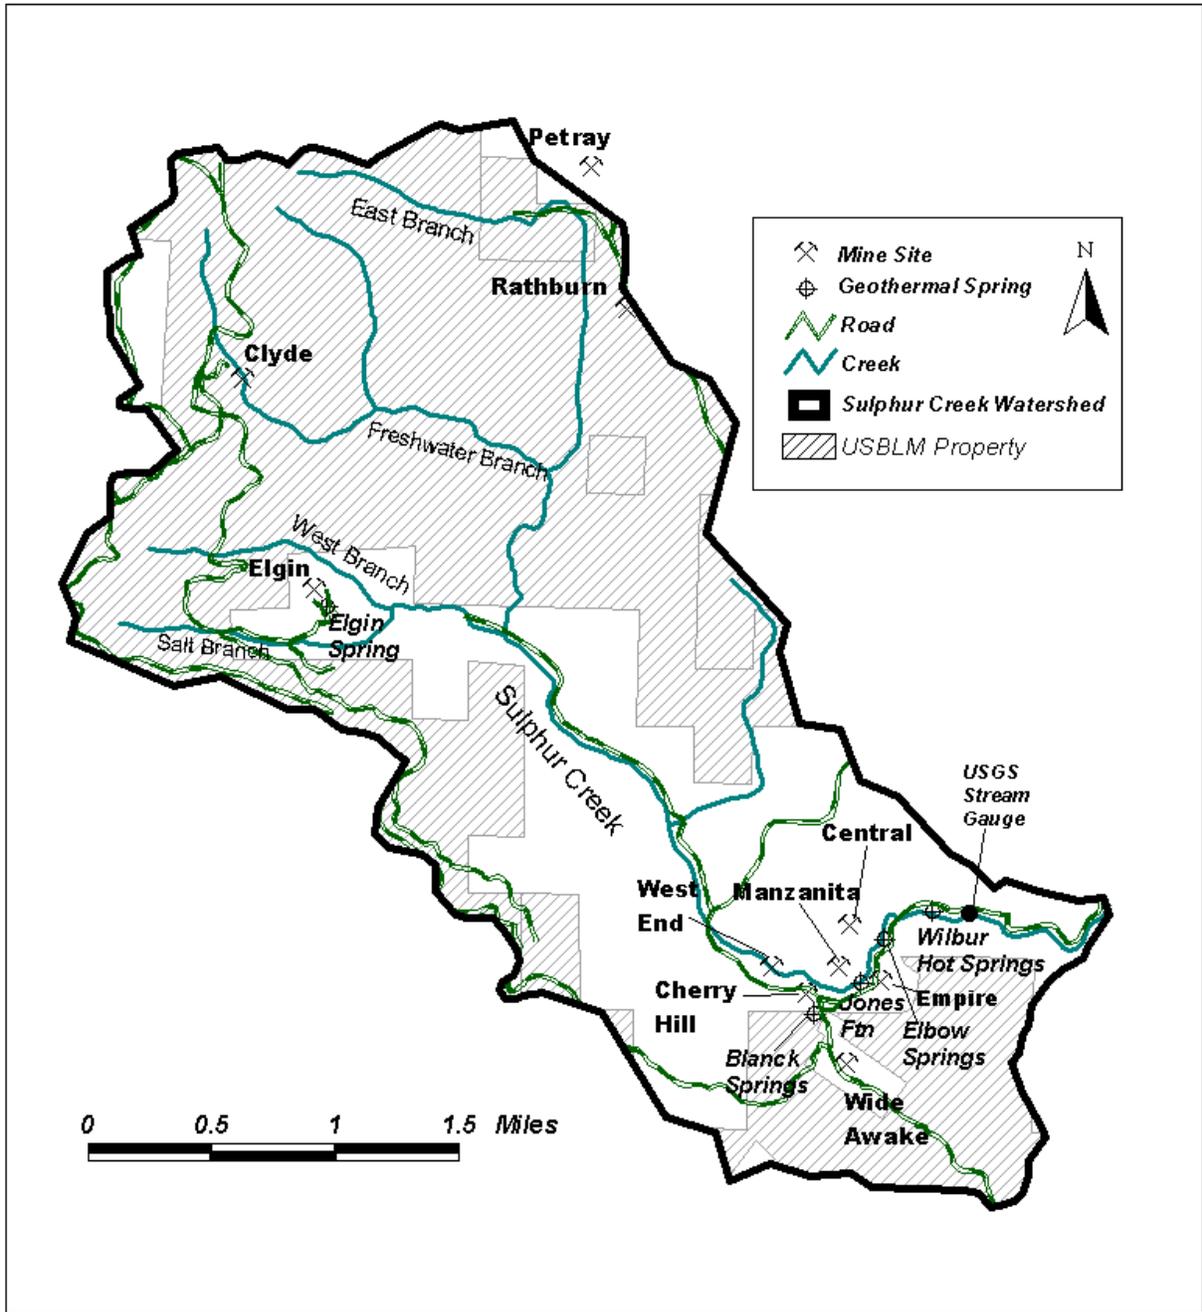


Figure 1.2 Sulphur Creek Watershed

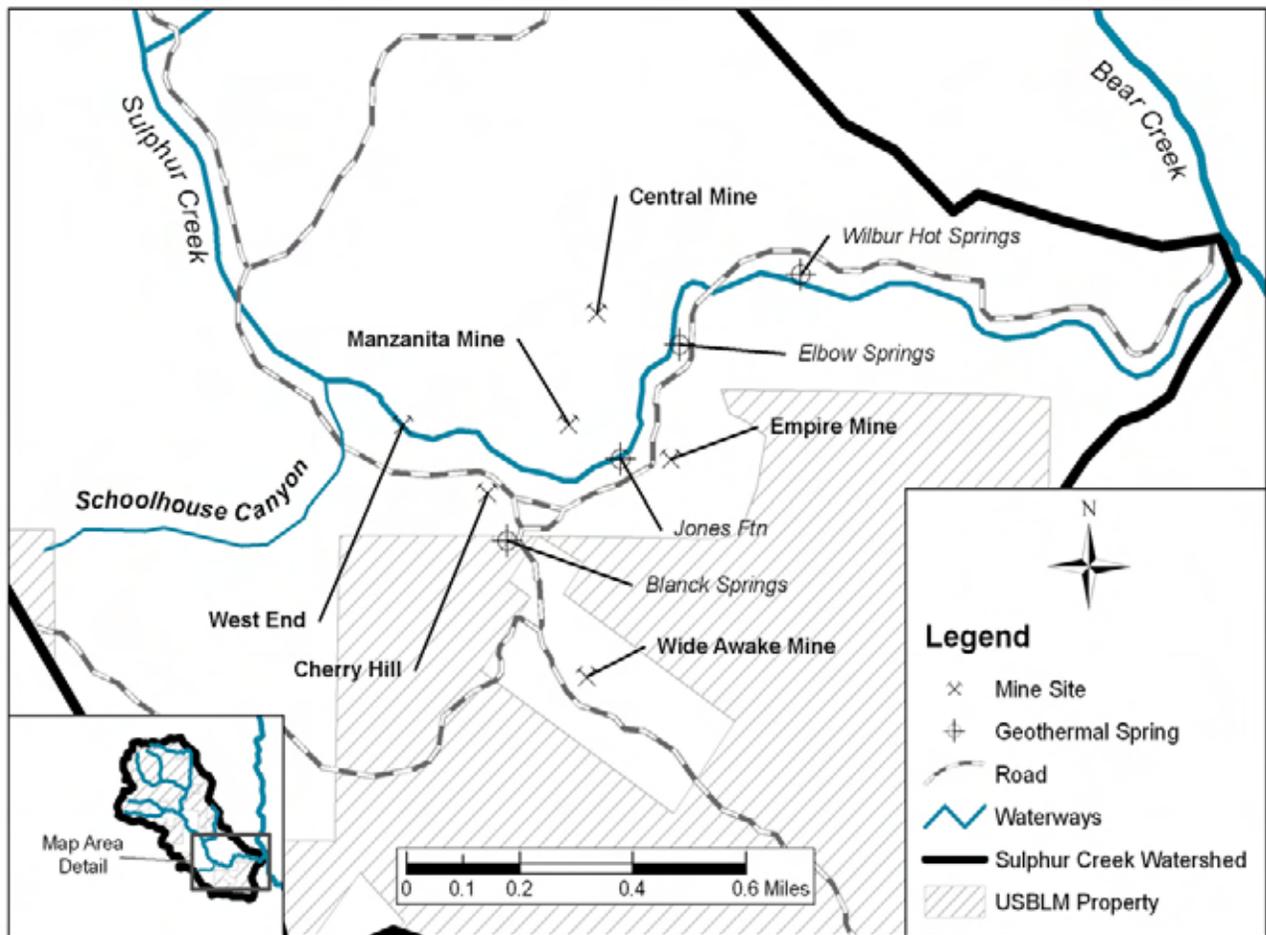


Figure 1.3. Lower Sulphur Creek, from Schoolhouse Canyon to the Mouth.

1.6 Toxicity of Mercury

1.6.1 Mercury Accumulation in Biota

Both inorganic mercury and organic mercury can be taken up from water, sediments, and food by aquatic organisms (Figure 1.3). Because organic mercury uptake rates are generally much greater than rates of elimination, methylmercury concentrates within organisms. Low trophic level species such as phytoplankton obtain most mercury directly from the water. Piscivorous (fish-eating) fish and birds obtain most mercury from contaminated prey rather than directly from the water (USEPA, 1997).

Repeated consumption and accumulation of mercury from contaminated food sources results in tissue concentrations of mercury that are higher in each successive level of the food chain. The proportion of total mercury that exists as the methylated form generally increases with level of the food chain (Nichols *et al.*, 1999). This occurs because inorganic mercury is less well absorbed and more readily eliminated than methylmercury.

1.6.2 Human Health

Mercury is a potent neurotoxicant, with methylmercury being the most toxic form. Ingestion of large amounts of methylmercury has resulted in impaired central nervous system function, kidney and gastrointestinal damage, cardiovascular collapse, and death. Effects from lower ingestion rates included impairments to peripheral vision, speech, hearing, and walking. Adverse neurological effects in children appear at dose levels five to ten times lower than dose levels associated with toxicity in adults (NRC, 2000).

Effects of methylmercury are dependent upon the dose received. The aquatic food web provides more than 95% of humans' intake of methylmercury (USEPA, 1997). There is no evidence of acute or chronic methylmercury toxicity to humans due to consumption of organisms from Sulphur Creek or Bear Creek.

1.6.3 Wildlife Health

Wildlife species may also experience detrimental effects from methylmercury exposure. The greatest concern for toxicity is for species that consume fish or other aquatic organisms. Adverse effects that have been observed with multiple species in the field or laboratory include impaired learning, ineffective social behaviors, weakened physical abilities, neurological damage, and reproductive impairment (Wolfe *et al.*, 1998). There have been no studies conducted showing adverse effects of methylmercury on wildlife species in the Sulphur Creek watershed.

1.7 Beneficial Uses and Applicable Standards

1.7.1 Beneficial Uses

The Federal Clean Water Act and the State Water Code (Porter-Cologne Water Quality Act) require identification and protection of beneficial uses. The Basin Plan identifies the designated existing and potential beneficial uses of surface waters in the Sacramento and San Joaquin Basins (CVRWQCB, 1998, Figure II-1 and Table II-1). Beneficial uses for Sulphur Creek are not explicitly assigned in the Basin Plan; however, the Basin Plan states that the beneficial uses of any specifically identified water body generally apply to its tributary streams. Sulphur Creek is a tributary to Bear Creek, which is a tributary to Cache Creek. Table 1.1 lists the beneficial uses of Cache Creek, which the Central Valley Water Board may apply to Sulphur Creek. Under the Sources of Drinking Water Policy (State Water Resources Control Board Resolution 88-63), the municipal and domestic supply designation (MUN) applies to this water body.

The major beneficial use of Sulphur Creek that is currently unmet due to mercury is as a safe habitat for wildlife species consuming organisms from the creek. Existing mercury levels also do not support the municipal and domestic supply (MUN) use. Please see the Staff Report titled, "Basin Plan Amendment to Determine Certain Beneficial Uses Are Not Applicable and Establish Water Quality Objectives for Sulphur Creek" (CVRWQCB, January 2007) for a discussion of modification of the MUN and human consumption of aquatic organisms beneficial uses.

Table 1.1 Existing and Potential Beneficial Uses of Cache Creek

Beneficial Use (CVRWQCB, 1998) (a)	Status
Municipal and domestic supply (MUN)	Existing ^(b)
Agriculture – irrigation and stock watering (AGR)	Existing
Industry – process (PROC) and service supply (IND)	Existing
Recreation – contact, canoeing, and rafting (REC-1)	Existing
Other non-contact (REC-2)	Existing
Freshwater habitat (Warm)	Existing
Freshwater habitat (Cold)	Potential
Spawning (SPWN) – warm and cold	Existing
Wildlife habitat (WILD)	Existing ^(b)

(a) The Basin Plan lists these uses for Cache Creek. The Central Valley Water Board may apply them to Sulphur Creek.

(a) Beneficial uses impaired by mercury in Sulphur Creek

1.7.2 Water Quality Objectives

The Numeric Target Section discusses development of numeric targets based on natural levels on mercury in the Sulphur Creek watershed. Other water quality criteria that apply to Sulphur Creek are discussed below. There are several different goals for aqueous concentrations of inorganic (total recoverable) mercury and one for methylmercury. A natural background target is more stringent in terms of protecting current aquatic life, wildlife, and humans beneficial uses than the water quality criteria described below.

Fish Tissue Goals

The USEPA published a recommended criterion for the protection of human health of 0.3 mg/kg methylmercury in the edible portions of fish (USEPA, 2001). The Cache and Bear Creek TMDLs focused on water quality goals for methylmercury in fish as being most protective of beneficial uses where fish are consumed. In a recent electroshocking event; however, the California Department of Fish and Game (DFG) found no fish in Sulphur Creek. As will be described, staff developed an alternative target for Sulphur Creek.

Aqueous Criteria and Goals

The USEPA has issued a safe level of methylmercury in drinking water to protect humans of 70 ng/L (Marshack, 2003). The maximum methylmercury concentration recorded in Sulphur Creek was 20 ng/L (Slotton *et al*, 2004a). The USEPA methylmercury drinking water level is not expected to be exceeded in Sulphur Creek.

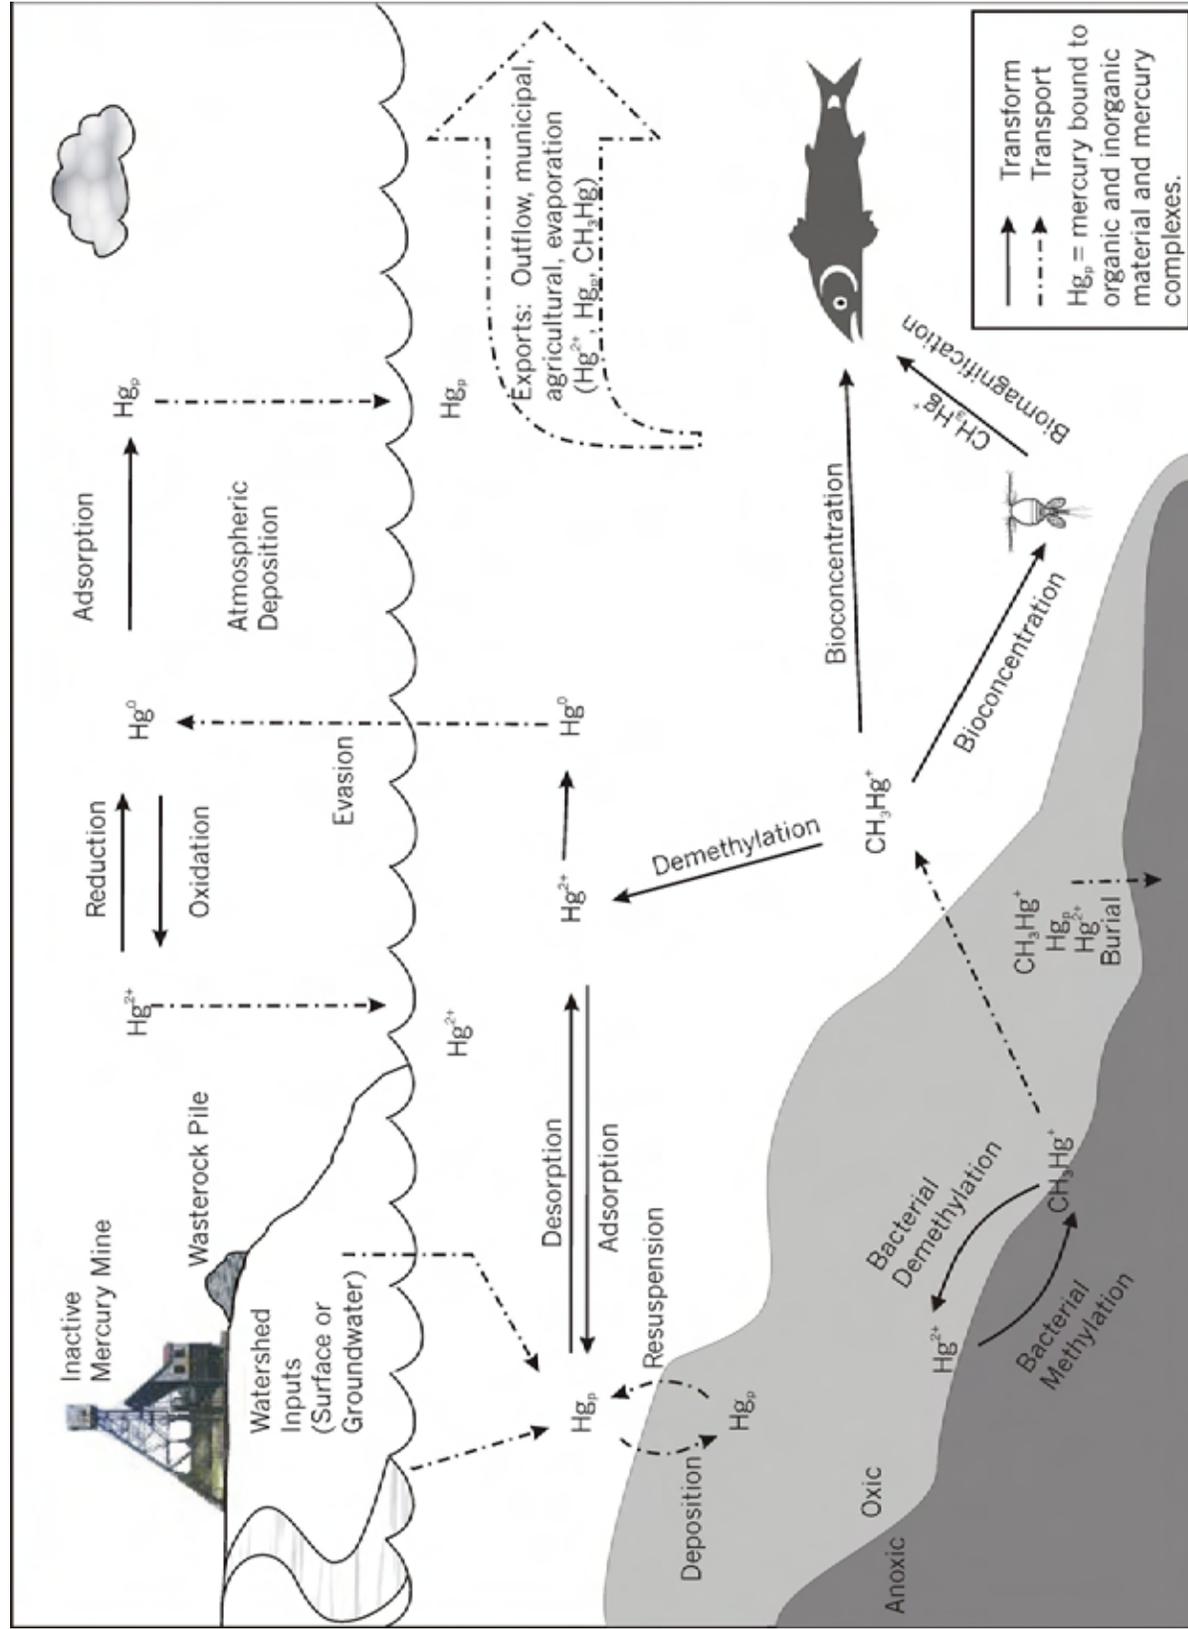


Figure 1.4 Mercury Cycling Conceptual Model

Although not issued specifically for California waters, a guidance level to protect the drinking water for livestock of 10,000 ng/L total mercury was developed by the United Nations (Ayers and Westcot, 1985). Livestock and wildlife species use Sulphur Creek for drinking water. The guidance level is exceeded in water taken directly from Jones Fountain and other geothermal springs. The geothermal waters are diluted as they enter Sulphur Creek. Water in Sulphur Creek occasionally exceeds the livestock guidance level during storm-related flows (Table 1.2).

The California Toxics Rule (CTR) contains a water quality criterion of 50 ng/L total recoverable mercury for freshwater sources of drinking water¹ (USEPA, 2000). The CTR criterion protects humans from exposure to mercury in drinking water and contaminated fish. The CTR criterion is enforceable for all waters with a municipal and domestic water supply beneficial use designation.

The CTR is likely exceeded during the winter in Sulphur Creek, especially during high water years. The CTR should be compared with averages of aqueous concentrations of total recoverable mercury occurring over 30-day periods. Continuous data have not been collected in Sulphur Creek. Regression analysis of flow and mercury concentration at the Sulphur Creek gauge indicate that 30-day average concentrations of mercury in Sulphur Creek were greater than 50 ng/L for several 30-day periods in a single winter.

1.8 Available Monitoring Data

Water samples have been collected at the USGS gauge near the creek mouth. Sediment at mine sites and water samples have been collected through research supported by the California Bay-Delta Authority (Churchill and Clinkenbeard, 2004; Suchanek *et al.*, 2004). Staff worked with California Department of Fish and Game (DFG) at Moss Landing to gather additional data in 2002-2004.

1.8.1 Fish Tissue Data

In December 2000, UC Davis researchers collected approximately 200 fish at diverse locations in the Cache Creek watershed as part of the CALFED mercury grant (Slotton *et al.*, 2004a). One fish was caught in Sulphur Creek, about 100 yards upstream from the confluence with Bear Creek. The fish was a California roach, *Lavinia symmetricus*, with a mercury concentration of 0.34 mg/kg, wet weight. Dr. Peter Moyle, a recognized expert on California fishes, surmised that rain runoff in winter may enable a roach to enter Sulphur temporarily from Bear Creek. Water chemistry, particularly sulfate, and high summer temperatures, however, prevent fish from living in Sulphur Creek (Moyle, 2005). In a survey conducted by electroshocking in April 2004, no fish were found in lower Sulphur Creek (DFG, 2004).

¹ The Federal rule did not specify duration or frequency terms. However, staff has previously employed a 30-day averaging interval with an allowable exceedance frequency of once every three years for protection of human health, which is recommended for application of this criterion (Personal communication from P. Woods, USEPA Region 9 to J. Marshack, CVRWQCB, 12/04/01).

1.8.2 Water Data

Several studies have collected water samples throughout Sulphur Creek and its tributaries. Central Valley Water Board staff (data in this report) and Suchanek and colleagues (2004) have collected water samples from Sulphur Creek to estimate loading from mine sites and geothermal springs. Goff and coworkers (2001) collected water samples as part of a larger record for geothermal springs. Table 1.2 shows the mean and range of concentrations of total recoverable mercury in Sulphur Creek and tributaries.

Table 1.2 Mercury in Sulphur Creek Water Samples

Sampling Location (upstream to downstream)	Number of Samples (^a)	Range of Concentrations Total Recoverable Mercury (ng/L)	Mean Concentration of Total Recoverable Mercury (ng/L) ^b
Upstream Clyde Mine	3	32 - 317	159
Downstream Clyde Mine	3	76 – 7,229	2,924
Upstream Elgin Mine ^c	3	358 – 21,917	8,535
Elgin Hot Spring	1	10,000	10,000
Downstream Elgin Mine	3	2,506 – 21,878	12,338
Sulphur Creek upstream from all mines except Elgin, Clyde, Rathburn, and Petray	3	330 – 1,879	850
Sulphur Creek upstream from West End Mine	4	342 – 3,422	1,794
Sulphur Creek downstream from West End Mine	6	230 – 3,894	1,370
Blanck Springs tributary input	6	635 – 2,110	1,334
Wide Awake Mine tributary input	6	2,450 – 15,243	5,841
Sulphur Creek downstream from Blanck Springs and Wide Awake Mine	6	351 – 17,360	3,465
Jones Fountain of Life Hot Spring	4	22,000 – 33,600	26,642
Unnamed tributary upstream from Elbow Springs	2	116 – 1,798	701
Sulphur Creek upstream of Wilbur Hot Springs	6	620 – 12,168	3,753
Sulphur Creek at the USGS gauge	36	245 – 16,411	2,764

(a) Foe & Croyle (1998), Suchanek, et al. (2004), Domagalski, et al. (2004), Goff, et al (2001), CVRWQCB data.

(b) Values in bold are average concentrations from the main channel of Sulphur Creek.

(c) During a later survey, Central Valley Water Board staff observed geothermal springs and potential mine waste upstream of this sample site, suggesting that the "Upstream Elgin" site may not have been free of mine influence.

2 SOURCE ANALYSIS

2.1 Introduction

Sulphur Creek is in a region naturally enriched in mercury. Geothermal vents and hot springs have deposited mercury, sulfur, and other minerals at or near the earth's surface. Sources of inorganic mercury now entering Sulphur Creek include mine waste from historic mercury mining operations, erosion of naturally enriched mercury soils, erosion of contaminated stream banks, runoff from geothermal springs, and atmospheric deposition of mercury. As a result, sediment in the bed and bank of Sulphur Creek is contaminated with inorganic mercury. All of these sources have exported mercury to Bear and Cache Creeks, contributing to elevated concentrations of methylmercury in fish tissue.

The majority of mercury in Sulphur Creek comes from the Sulphur Creek Mining District. The mining district includes six inactive mines (Central, Empire, Wide Awake, Cherry Hill, West End and Manzanita) in the lower watershed and two inactive mines (Clyde and Elgin) in the upper watershed. Rathburn, Rathburn-Petray, and South and North Petray mines are also located in the District but drain primarily east to Bear Creek.

Concentrations and loads of mercury and methylmercury discussed below refer to levels in unfiltered (raw) water. Few data are available of total mercury and methylmercury in filtered samples. Most inorganic mercury in Cache and Bear Creeks is transported attached to sediment (Domagalski *et al.*, 2004). Slotton and colleagues (2004a) found that, of all relationships examined between mercury and biota in the Cache Creek watershed, the most significant correlations were between concentrations of methylmercury in unfiltered water and biota. Therefore, staff relied on concentrations in unfiltered samples throughout this report.

In this section, a water budget for Sulphur Creek is presented followed by a mass balance of total mercury loads. The total mercury mass balance is based on water samples collected throughout the watershed during six storm events and is used for allocation of mercury loads (Section 5). The estimate of total loads from the mercury mass balance is validated by comparison with other calculations of mercury loads. These other calculations were made using additional water data collected at the USGS gauge. Contributions to the mercury loads from runoff of background, mercury-enriched, and mine site sediment, contaminated instream sediment, geothermal springs, and atmospheric deposition are also discussed. This section concludes with a calculation of methylmercury loads.

2.2 Water Budget

Flow is a critical component of calculating mercury and sediment load balances. Flow volume is multiplied by the concentration of each constituent in order to determine loads. The USGS operated one flow gauge on Sulphur Creek about one mile upstream of the confluence with Bear

Creek. Continuous flow data are available from this gauge for water years 2000 through 2003². An analysis of flow data is presented in Table 2.1

Flow data are not available for any other part of the Sulphur Creek watershed and the rational method³ of flow estimation could not be utilized because the nearby rain gauge was not accurately recording data during the period of record at the flow gauge. Flows from sampling sites in the watershed were estimated based on the size of the given drainage area relative to the area of the gauge site. Staff used ArcView GIS software to calculate watershed areas from each of these sites in order to estimate flow. Flow estimates are listed in Appendix A.

Appendix A also shows the four years of flow recorded at the USGS gauge. Each graph depicts the average daily flow during one water year. The creek experiences 4-6 storm events per year that create peak flows. Storm events can increase flow to over 300 cfs in a few hours and flows then taper to average winter non-storm flow (≤ 5 cfs) in the days following the event (USGS, 2004). Approximately 73 % of water volume exported from Sulphur Creek occurs during storm events and associated runoff (flows greater than 5 cfs). Flows less than 5 cfs contribute to 15% of the yearly flow. The California Department of Water Resources (DWR) classified water years 2000 and 2003 as above normal and water years 2001 and 2002 as dry years⁴.

Table 2.1 Annual Flow Measured at USGS Gauge

Water Year	Average Daily Flow (cfs) ^a	Maximum Average Daily Flow (cfs)	Minimum Average Daily Flow (cfs)	Total Acre-feet/Year
2000	3.4	76	0.06	2,254
2001	2.0	93	0.05	1,439
2002	3.9	156	0.12	2,839
2003	4.6	140	0.11	3,307

(a) Data was accessed from the USGS water homepage (<http://water.wr.usgs.gov/>).

Several geothermal springs flow into Sulphur Creek and their flows are included with flow measured at the gauge site. Average spring flow rates are listed in Table 2.5. Other components of the water budget include evaporation and groundwater; however, data are not available and their influence in the overall water budget is insignificant.

² A water year is defined as 1 October of the previous year through 30 September of the specified year. For example, the 1996 water year encompasses 1 October 1995 through 30 September 1996.

³ The rational method equation is $Q=CIA$

Where: Q = flow I = rainfall
C = runoff coefficient A = watershed surface area

⁴ DWR classifies water years based on an index of unimpeded runoff. For the Sacramento River Basin, runoff is measured at several points within the watershed. An “above normal” water year means the index is above 7.8 and equal to or less than 9.2. A “dry” water year means the index is above 5.4 and equal to or less than 6.5. More information on water year classification can be found on <http://cdec.water.ca.gov/cgi-progs/iodir/WSIHIST>.

2.3 Mercury Sources Entering Sulphur Creek

2.3.1 Mass Balance of Mercury in the Sulphur Creek Watershed

In order to identify sources of mercury measured at the gauge, concentrations of mercury and TSS were examined at multiple sites throughout the watershed on six occasions. Samples were collected by staff from UC Davis and United States Fish and Wildlife Service (USFWS) (Slotton, *et al.*, 2004a and Suchanek, *et al.* 2004), and the Central Valley Water Board and DFG (data this report). All sampling events took place during or after storms. Not enough data are available from these events to develop a statistical relationship between mercury concentrations and flow for the individual sites. As a result, site-specific average mercury concentrations from all events were multiplied by annual discharge to determine relative source load contribution to Sulphur Creek. As noted in Section 2.2, annual discharge was estimated at each site using the acreage of the drainage area at each site relative to drainage area at the USGS flow gauge and developing a proportional value of discharge volume. Table 2.2 summarizes the four-year average load from specific points in the watershed as well as the percent contribution from each site. Figure 2.1 provides a conceptual diagram of mercury loads from each sub-watershed relative to acreage in their respective basins. Appendix B lists data used in the load calculations.

Table 2.2 Sulphur Creek Mercury Loads

Site (Upstream to Downstream)	Average Annual Mercury Loads (kg/yr) ^a	Percent Contribution to Loads Exported at USGS Gauge
Tributary Loads		
Upper Watershed (East Branch, Salt Branch, mainstem Sulphur to West End)	1.2	10%
Clyde Mine sub-watershed (Freshwater Branch)	0.4	3%
Elgin Mine sub-watershed (West Branch)	2.7	22%
Blanck Springs tributary	0.02	0.2%
Wide Awake Mine tributary	0.8	7%
Empire Mine tributary	0.1	1%
Sum	5.2	44%
Mainstem Loads^b		
West End Mine sub-watershed	-0.9	-7%
Manzanita Mine sub-watershed	4.8	40%
Central Mine sub-watershed	1.9	16%
Wilbur Springs sub-watershed	0.8	7%
Sum	6.2	56%
Load at USGS Gauge ^c	11.8	
<p>(a) Appendix C provides a more detailed table of how load estimates were calculated.</p> <p>(b) These are not loads coming from specific mine sites. Samples were collected upstream and downstream of the mine sites and these names are used as landmarks in order to determine instream loads between sites along the mainstem of the creek.</p> <p>(c) The difference in load from downstream to upstream of West End Mine equals -0.9 kg/yr, which suggests no mercury load comes from this section of the creek. This portion of the creek may be a depositional area and may be a load source, depending on storm events. Churchill and Clinkenbeard (2004) describe this area as being erosional with elevated concentrations of mercury in hillside sediments.</p>		

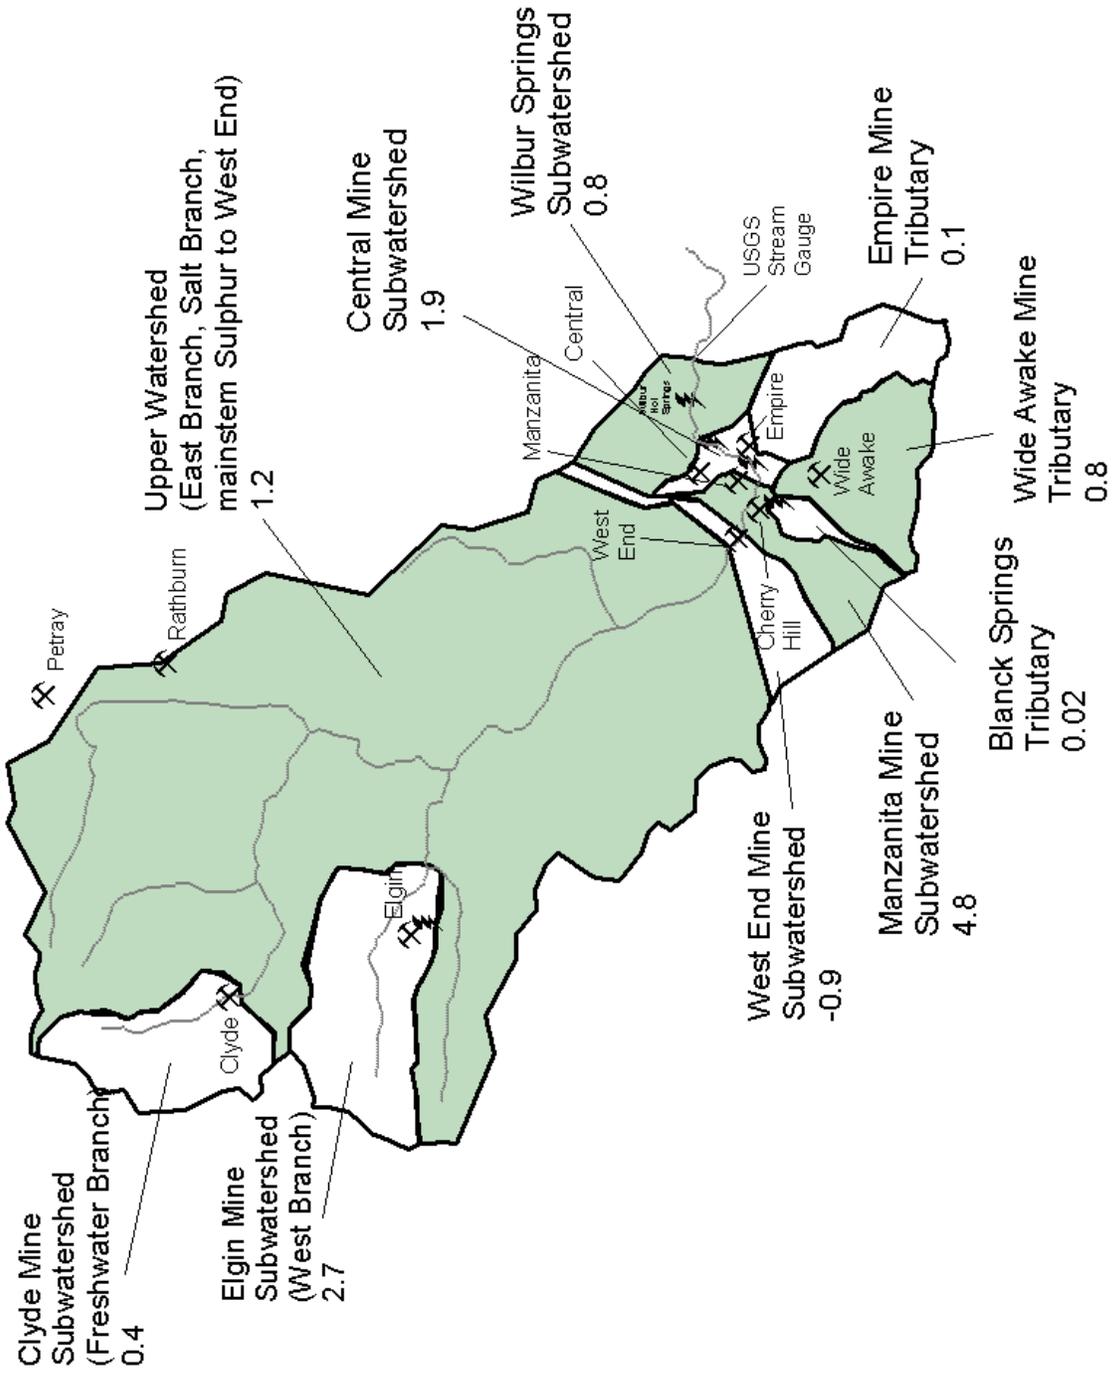


Figure 2.1 Sulphur Creek Sub-watershed and Tributary Loads (kg/yr)

Loads from tributary inputs total 5.3 kg/yr, which account for 44% of the load exported out of Sulphur Creek. Upper watershed sources account for 9% of the total Sulphur Creek load. The upper watershed includes the East Branch, Salt Branch, the West Branch and Freshwater Branch downstream of Elgin and Clyde mines, respectively, to Schoolhouse Canyon. Storm events limit accessibility and better source identification to this large portion of the Sulphur Creek watershed. Mercury sources in the upper watershed come from erosion of background and mercury enriched soil and resuspension of previously deposited instream sediment contaminated by mercury. Petray and Rathburn mines are located in the East Branch but runoff from these sites likely now flows into Bear Creek and not Sulphur Creek. Initial workings at the Rathburn and Petray mines, road cuts, or unnamed mine prospects may have contributed to contaminated sediment in the East Branch. In the water years represented by this budget, it appears that loads from non-mineralized areas (mostly in the Upper Watershed) are small, relative to other sources.

West Branch, where the Elgin Mine is located, contributes the largest load (2.7 kg/yr) of all the tributary sources, accounting for 22% of the mercury load leaving Sulphur Creek. Samples were collected upstream and downstream of Elgin Mine and the difference in the load averaged 1.2 kg/yr (Appendix C), accounting for 44% of the West Branch load. Samples collected upstream of Elgin Mine may not have been out of the zone of mine influence and the load contribution from the site may actually be higher. Freshwater Branch, where Clyde Mine is located, contributes 3% of the mercury load exported out of Sulphur Creek. The load difference between upstream and downstream of the mine averages 0.4 kg/yr, accounting for 95% of the load within Freshwater Branch. Sources of mercury from upstream of both mine sites come from background and mercury enriched sediment runoff. Based on erosion rates, Churchill and Clinkenbeard (2004) estimate between 3.9 and 9.3 kg/yr of mercury are mobilized from Elgin Mine site features and 0.04 to 0.07 kg/yr mercury come from Clyde Mine site features.

The tributaries where Empire and Wide Awake mines are located contribute 1% (0.1 kg/yr) and 7% (0.8 kg/yr) of the Sulphur Creek load, respectively. Mercury sources from the tributaries include runoff from mine sites, enriched soil and background soil. Samples were not collected upstream of the mine sites so specific mine load contributions (less background) could not be estimated. For comparison, Churchill and Clinkenbeard (2004) estimate between 0.02 and 0.44 kg mercury are delivered to the tributary from Wide Awake Mine features and between 0.04 and 0.06 kg mercury come from Empire Mine features per year.

Mercury loads in the mainstem of Sulphur Creek between downstream of West End Mine to the USGS stream gauge average 6.7 kg/yr, accounting for 56% of the load (Table 2.2).

The mainstem portion of the creek from upstream to downstream of West End Mine appears not to be a source of mercury. Four sampling events were conducted to determine West End Mine contributions. Half of the samples had larger mercury concentrations upstream than downstream of West End Mine. However, Churchill and Clinkenbeard (2004) estimate that West End Mine contributes as much as 1.1 kg of mercury each year to the creek based on erosion estimates.

The largest portion of the mainstem load comes from the section between downstream of West End Mine and upstream of Wilbur Hot Springs and accounts for 56% of the total load

(Table 2.2). Sources of mercury from this area come from stored sediment in the creek that is remobilized during storm events, Jones Fountain, Elbow springs, instream geothermal springs, and runoff from Manzanita and Central mines, mercury enriched soil and background soil. Based on erosion calculations, between 0.3 and 6.5 kg mercury per year come from Manzanita Mine and between 0.003 and 0.03 kg/yr mercury come from Central Mine features (Churchill and Clinkenbeard, 2004). Mercury load contributions from Cherry Hill Mine are unknown.

Loads between upstream of Wilbur Springs to the outflow at the gauge account for 7% of the Sulphur Creek load. Sources of mercury in this portion of the creek include instream sediment remobilized during storm events, Wilbur Springs, and runoff from background and mercury enriched soils.

2.3.2 Mercury in Runoff

All of the sites within Sulphur Creek accumulate mercury in runoff. Mercury in runoff derives from three sources: mine sites, mercury enriched (mineralized) areas, and from soil containing background concentrations of mercury. Churchill and Clinkenbeard (2004) estimate between 5.4 and 39.9 kg/yr comes from runoff with most of the load coming from mine site features (Table 2.3). The term, “mineralized areas”, describes the soil and rock that is enriched in mercury as part of a mercury deposit, but was undisturbed by mining operations. Although mercury concentrations can be high, loads from the undisturbed mineralized area are small because the surface areas of the zones are small.

Table 2.3 Mercury Loads from Mine Sites, Background Soil, and Mineralized Areas (kg/yr)^a

	Minimum Mercury Load	Percent Contribution	Maximum Mercury Load	Percent Contribution
Mine Site Contribution ^b	4.4	81%	18.6	47%
Background Soil	0.9	17%	19.7	49%
Mineralized Areas	0.08	1%	1.6	4%
Total	5.4		39.9	
(a) Data from Churchill and Clinkenbeard (2004).				
(b) Without Rathburn and Petray Mines.				

Mines contribute between 47 and 81 percent of the mercury load. Areas disturbed by mining account for 230 of the 6543 acres in the Sulphur Creek watershed. Undisturbed, mercury enriched areas account for an estimated 120 acres in the watershed, which have soil mercury concentrations that range up to 500 times higher than regional background. Background soil may contribute a large portion of runoff due to the relative amount of acreage; however, the actual amount of mercury delivered to the creek from all runoff is unknown. Churchill and Clinkenbeard (2004) believe that only a small portion actually enters Sulphur Creek and loads are closer to the lower estimate. Erosion from these features may be immobilized by grass cover and redeposit on the hillsides.

Churchill and Clinkenbeard’s (2004) method used to estimate loads of mercury in mine site, mineralized soil and background soil runoff (Table 2.3) is different than the watershed-based load estimates in Table 2.2 prepared by Central Valley Water Board staff. As described above,

the watershed mass balance estimates were developed using instream mercury concentration data collected at multiple points in the watershed and stream flow rates based on relative size of the sub-watershed draining to the sampling point. Churchill and Clinkenbeard (2004) estimated runoff from mine waste rock piles, tailings piles and other land features using primarily the Revised Universal Soil Loss Equation (RUSLE). The RUSLE model incorporates local information regarding temperature, rainfall, slope steepness and length, soil type and vegetative cover to produce estimates of average annual soil loss. The ranges in estimates in Table 2.3 are due to use of minimum and maximum estimates of the soil erosion rate for each area. Both methods provide valuable information about mercury transport in the Sulphur Creek watershed. The two load estimates may not coincide because of variability in erosion and length of time for eroded material to reach the creek.

2.3.3 Instream Sediment Mercury Concentrations

Geothermal precipitates and runoff from background soil, mineralized areas, and mine sites deposit mercury laden sediment to the active channel in Sulphur Creek. Sediments within the creek provide a source of mercury to downstream areas during storm events. High flows disturb and remobilize mercury-contaminated sediment, which are either redeposited instream or moved out of the creek. Several instream sediment samples have been collected in the mainstem of Sulphur Creek and in the tributaries of the upper watershed (Figures 2.2 and 2.3). The purpose of stream sediment sampling was to examine mercury concentrations and potential sources in areas of the watershed that are inaccessible during storm events. The concentrations of mercury in fine-grained stream sediment can be compared with concentrations of mercury in suspended sediment (Hg/TSS ratio). Tetra Tech (2004) describes tailings or waste rock exposed by the Sulphur Creek channel and within the floodplain near the Manzanita and Cherry Hill mines.

Samples collected on the East Branch, downstream of Rathburn and Petray mines contained 3.0, 6.4 and, 9.2 mg/kg mercury, suggesting that the mines or other sources may contribute to elevated instream mercury concentrations. Other possible sources of elevated mercury in this portion of the creek may be runoff from the several road cuts in the area, runoff from unidentified mercury enriched soil, or activities at unnamed mine prospects. Sediment samples on the Freshwater Branch, downstream of the Clyde Mine, have similar concentrations to those on the East Branch, with 2.0 and 3.0 mg/kg mercury. Instream sediments on the West Branch near Elgin Mine are highly contaminated with mercury and have the potential to be transported down the creek. Samples collected on this tributary ranged from 3.5 mg/kg upstream of Elgin Mine up to 327 mg/kg near the mine site to 33 and 41 mg/kg at the confluence with the Freshwater Branch. Salt Branch has no mines in its watershed and is a tributary to the West Branch. Sediment samples from this tributary contained 0.4 and 1.1 mg/kg mercury.

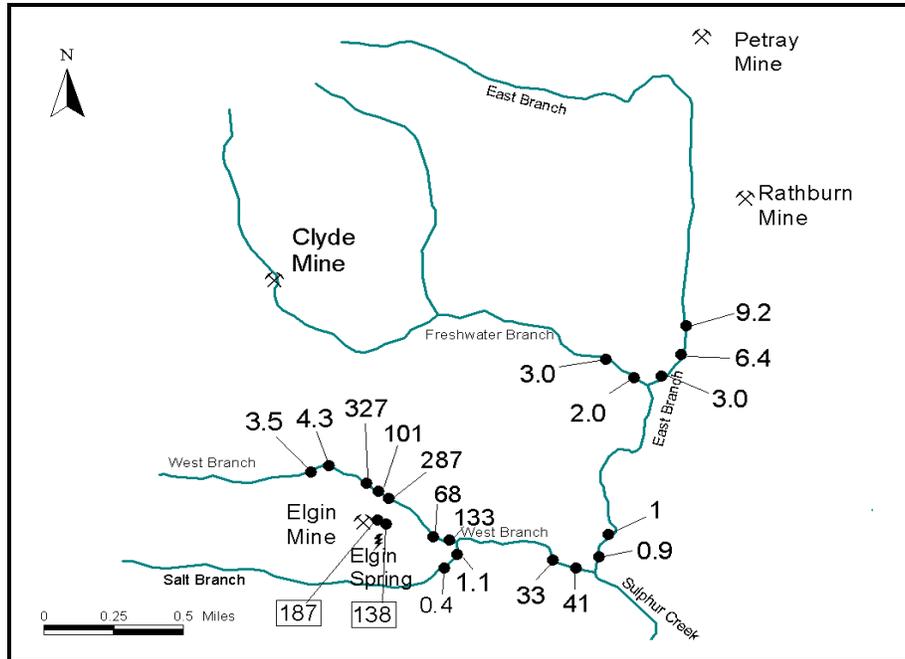


Figure 2.2 Fine Sediment Instream Mercury Concentrations (mg/kg) in the Upper Watershed of Sulphur Creek. Values enclosed in a box are samples from geothermal spring “muck”. (Source data: Goff *et al.* 2001 and CVRWQCB, data this report)

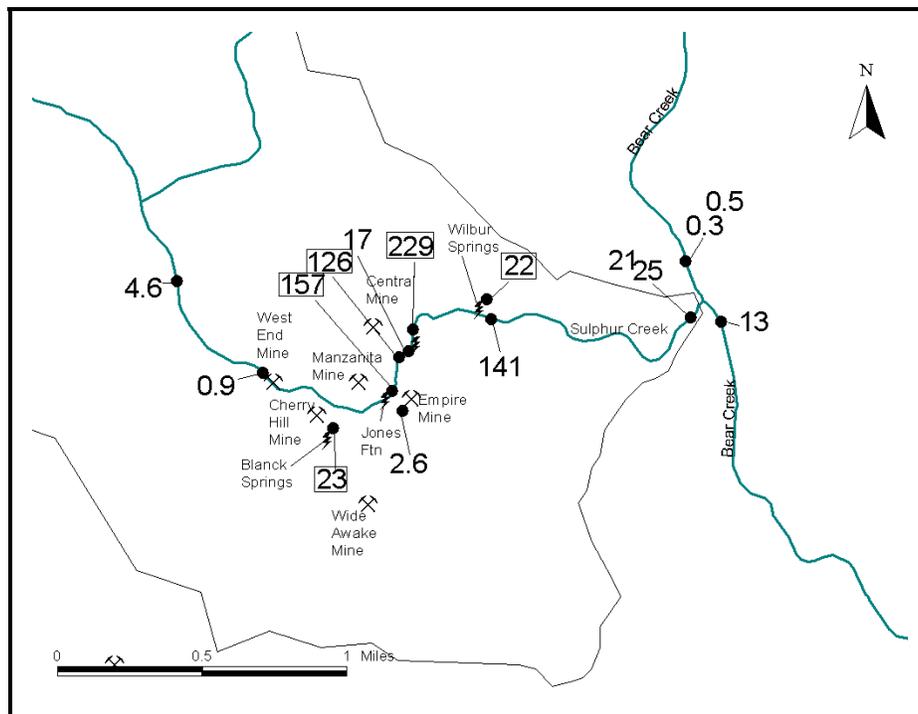


Figure 2.3 Fine Sediment Instream Mercury Concentrations (mg/kg) in the Lower Watershed of Sulphur Creek. Values enclosed in a box are samples from geothermal spring “muck”. (Source data: Goff *et al.* 2001 and CVRWQCB, data this report)

Mercury concentrations in samples collected in mainstem Sulphur Creek vary widely. Concentrations range between 4.6 mg/kg upstream of West End Mine to 0.9 mg/kg near Manzanita Mine and 141 mg/kg near Wilbur Springs to 21 and 25 mg/kg at the mouth of Sulphur Creek. Samples were also collected upstream and downstream of the Sulphur Creek confluence on Bear Creek. Bear Creek upstream samples measure 0.3 to 0.5 mg/kg (near background concentrations) while downstream of the confluence contains 12.9 mg/kg.

2.3.4 Mercury to Suspended Sediment Ratio

The ratio of concentration of mercury to concentration of suspended sediment (Hg/TSS) in water is a measure of mercury contamination in surficial sediment. Sulphur Creek regional background concentrations range between 0.07 and 0.31 mg/kg in soil (Churchill and Clinkenbeard, 2004). Mercury concentrations in soil naturally enriched with mercury averaged 1.6 mg/kg (Churchill and Clinkenbeard, 2004 and Pearcy and Petersen, 1990).

Hg/TSS ratios from all samples collected at the flow gauge range between 6.1 and 384.3 mg/kg and average 51.6 mg/kg (includes low flow data). Hg/TSS samples collected using a Sigma Autosampler ranged between 22.6 and 170.7 mg/kg prior to the storm event on February 25, 2004 (Appendix G). As storm flows subside, Hg/TSS declined (Figure 2.4).

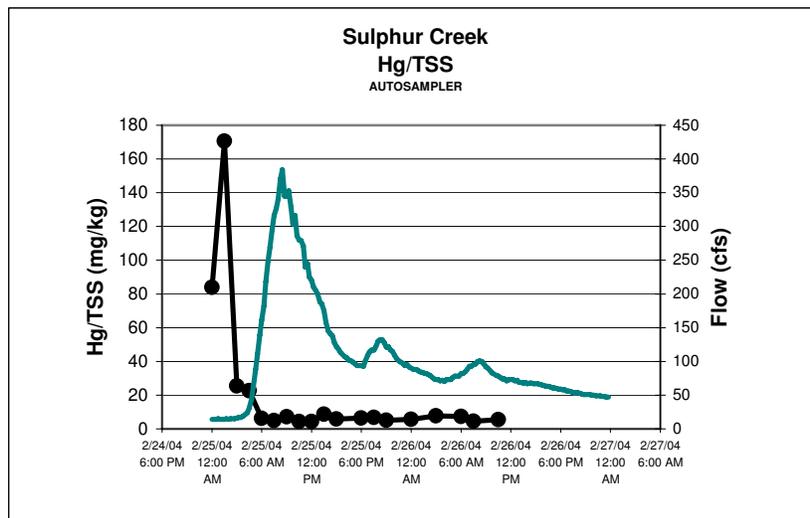


Figure 2.4 Mercury to TSS Ratios Compared to Flow During One Storm Event in Sulphur Creek

The change in Hg/TSS over time is likely evidence of the multiple types of mercury sources in Sulphur Creek. Precipitates from the geothermal springs are flocculent, have high mercury concentrations, and would likely mobilize quickly with a small increase in flow (Rytuba, 2000). The initial runoff is associated with a sharp peak in the Hg/TSS ratio. This peak likely represents mobilization of geothermal precipitates. The lower Hg/TSS levels observed during most of the storm are likely indicative of mercury from the mine sites and contaminated stream banks.

Supporting this observation that Hg/TSS concentrations are also high in the summer, when low flows are dominated by geothermal outputs.

2.3.5 Sulphur Creek Baseline Flows and Loads – Geothermal Input

Several geothermal springs flow into Sulphur Creek and for most of the year account for the base flow. Wilbur Hot Springs, Jones Fountain of Life, and Blanck and Elbow springs are some of the larger geothermal sources with smaller springs bubbling up within the creek. The springs contribute a portion of the total mercury load to Sulphur Creek.

Historic flows recorded at the USGS stream gauge between April and November are assumed to represent flows from geothermal spring sources, as rainfall during this period is rare. Flows range between 0.05 and 1.9 cfs with a median of 0.23 cfs. Ninety-four percent of the summer flows range between 0.1 and 1 cfs. Churchill and Clinkenbeard (2004) report site-specific flow from all the named hot springs total 0.08 cfs. Flow from unknown and instream geothermal springs may account for the difference in flow at the gauge site.

Seven water samples collected at the gauge for mercury analysis between 28 April and 20 November from multiple sampling years represent average summer (low flow) concentrations. Concentrations range between 245 and 1768 ng/L and average 847 ng/L. Average mercury concentrations were multiplied by the median flow in order to determine mercury loads from geothermal sources. Total mercury loads range between 139 and 271 g/yr with an average of 193 g/yr (Table 2.4). In comparison, Churchill and Clinkenbeard (2004) estimate geothermal mercury loads range between 170 and 290 g/yr.

Table 2.4 Annual Low Flow Mercury Loads As A Method to Estimate Thermal Spring Inputs

	Average	Minimum	Maximum
Total Mercury Concentration (ng/L) n = 7	942	676	1320
Total Mercury Load (g/yr)	193	139	271
Median Flow at USGS stream gauge (cfs)	0.23		

Table 2.5 provides site-specific geothermal spring flows, concentrations and loads. Total mercury loads from named springs contribute an average of 731 g/yr to Sulphur Creek, which is a higher estimate than loads calculated at the USGS gauge. Instream deposition and spring precipitates that settle in the creek may account for the difference. Jones Fountain, Wilbur Hot Springs, and Elgin Spring contribute the largest geothermal mercury loads. Mercury precipitates from geothermal springs may actually be a larger source of mercury on an annual basis than mercury measured in spring fluid (Churchill and Clinkenbeard, 2004 and Domagalski, *et al.*, 2004). Precipitates downstream of geothermal vent areas contain between 1 – 300 mg/kg mercury. They accumulate during the summer and are flushed downstream during winter high flow events.

Table 2.5 Site Specific Mercury Loads from Geothermal Springs

Spring	Flow (cfs)	Average Hg Concentrations (ng/L) ^{a,b}	Geothermal Hg Loads (g/yr)
Blanck	0.008	6,900	49
Elbow	0.0003	61,000	16
Jones Fountain	0.012	26,642	286
Wilbur Hot Springs	0.047	5,556	233
Elgin ^c	0.015	11,000	147
Total	0.083		731
<p>(a) Wilbur Springs and Jones Fountain are the only sites where multiple samples have been taken and these values represent their average concentrations. Data from these sites are in Appendix D. All other spring sites have one sample measurement.</p> <p>(b) Sources include: Rytuba, 2000; Goff <i>et al.</i>, 2001; Suchanek <i>et al.</i>, 2004; data collected in 2003 and 2004 by Central Valley Water Board and DFG staff in this report.</p> <p>(c) Elgin Spring is located in the upper Sulphur Creek watershed. Flows likely don't enter into the mainstem of Sulphur Creek during the summer.</p>			

Neither geothermal spring estimate accounts fully for the mercury that is thought to be discharged from the geothermal springs in the lower watershed. The estimate of annual contribution at the gauge, which is based on summer (i.e., non-runoff) concentrations, does not account for the load from precipitates, which are mobilized in higher flows (Churchill and Clinkenbeard, 2004). The estimate of loads from spring orifices includes much of the mercury that precipitates, but does not include the springs within the stream bed, which have not been measured. To account for the precipitates and non-measured springs, staff doubled the sum of loads from individual springs in the lower watershed for a total geothermal spring input estimate of about 1.4 kg/yr. This total estimate for lower watershed springs is used in the load allocations (Section 5).

2.3.6 Atmospheric Deposition

Atmospheric loads of mercury derive from global, regional, and local sources. Atmospheric input is the wet and dry deposition falling directly to water surfaces and indirect deposition on the terrestrial watershed with subsequent runoff during storms. Evaluating the atmospheric inputs is important to understand the significance of atmospheric deposition relative to other sources. Modulating deposition from the global/regional atmospheric sources is beyond the regulatory ability of the Central Valley Water Board.

Staff used similar methods in determining atmospheric mercury loads to Sulphur Creek as were estimated in Cache Creek (CVRWQCB, 2004). First, estimates are calculated for mercury that deposits to the surface of Sulphur Creek itself. Second, estimates are made for the amount of mercury deposited on the Sulphur Creek watershed that reaches the creek in runoff.

Annual deposition to the surface of Sulphur Creek ranges between 0.09 and 0.19 g/yr. This range is derived from estimates of wet and dry deposition at Covelo, CA (minimum value of 3.9 ng/L; NADP, 2000a,b) and San Francisco (maximum value of 8 ng/L; SFEI, 2001) multiplied by the average annual rainfall at Sulphur Creek. Dry deposition rates are assumed to be equivalent to wet (SFEI, 2001). The contributions directly to the creek are so low that they are considered insignificant to the total annual load. See Appendix E for complete calculations.

Atmospheric deposition that does not fall directly to the creek but falls within the watershed is accounted for in samples collected during periods of storm runoff. To estimate the amount of mercury from the atmosphere to the watershed that reaches Sulphur Creek, staff applied the rates of mercury deposition and average annual precipitation described above to the area of the entire Sulphur Creek watershed. The watershed area of 6543 acres is estimated to receive 70-144 g/year of mercury from the atmosphere. Assuming 10% of the terrestrial load is transported into waterways (Dolan *et al.*, 1993; SFEI, 2001) the indirect atmospheric contribution to loads in Sulphur Creek is 7-14 g/year. This estimate is not identified separately because the atmospheric loads would be counted twice (i.e., the runoff of atmospheric mercury into Sulphur Creek is already accounted for in load estimates in Table 2.2). Atmospheric contributions to the Sulphur Creek watershed are nominal compared to other sources.

2.4 Comparison Estimates of Total Mercury Loads

2.4.1 Mercury loads at the USGS stream gauge

Section 2.3.1 describes the calculation of mercury loads throughout the Sulphur Creek watershed based on six storm events. Additional data has been collected at the USGS stream gauge in order to quantify mercury loads exported from the watershed (Foe and Croyle, 1998; CVWQCB, 2004 and unpublished data; Domagalski *et al.* 2004; Slotton *et al.* 2004a; Suchanek *et al.* 2004). Samples were collected during both non-storm and storm events between 1998 and 2004. A few storm sampling events captured some of the highest concentrations and loads exported out of Sulphur Creek in this time span however, these years are not classified as “wet” years. Larger storm events could remobilize and transport even larger mercury loads. Concentrations of total mercury range between 245 and 16,411 ng/L, with an average concentration of 2764 ng/L ($n = 36$). A positive correlation exists between total mercury concentrations and flow ($r^2 = 0.49$, $p < 0.0001$) (Appendix F). The linear equation derived from the regression analysis is used to estimate a flow-weighted concentration on days where mercury samples were not collected but flow data are available.

Annual mercury loads are calculated by multiplying the mean daily flow by the flow-weighted mercury concentration and summing over the year. Mercury loads range between 3.7 and 12.3 kg/yr with an average of 8.0 kg/yr. Suchanek *et al.* (2004) estimated mercury loads ranged between 0.6 and 10.7 kg/y for water year 2000 and 0.6 and 17.1 kg/yr for water year 2001. These load estimates are comparable to the load calculated in the mass balance in Table 2.2.

2.4.2 Mercury samples collected using a Sigma Autosampler

Staff installed a Sigma Autosampler at the USGS gauge prior to a storm event to collect water samples every 90 minutes between the 25th and 26th February 2004. The samples were analyzed for total mercury and TSS in order to determine the nature of mercury and sediment loading during storm events. Instantaneous flow values for every quarter hour during the storm were accessed from the USGS website in order to develop load estimates. Laboratory results and flow values are in Appendix G.

Figure 2.5 shows total mercury concentrations peaking on the leading edge of the storm prior to peak flows and ebbing as flows subside. Figure 2.6 shows peak loads coinciding with peak flows. As flows subside, mercury loads return to levels similar to the pre-storm event. Staff estimates that during this 36-hour period of sampling 1.6 kg mercury were exported out of Sulphur Creek. Between 6.4 and 9.6 kg of mercury would be exported annually during storm events considering that Sulphur Creek experiences between 4 and 6 major storms per year. This range is similar to load estimates discussed above.

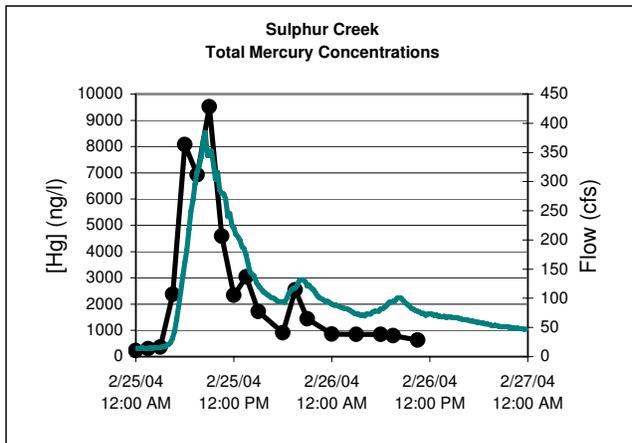


Figure 2.5 Total Mercury Concentrations Compared to Flow in Sulphur Creek Collected by a Sigma Autosampler.

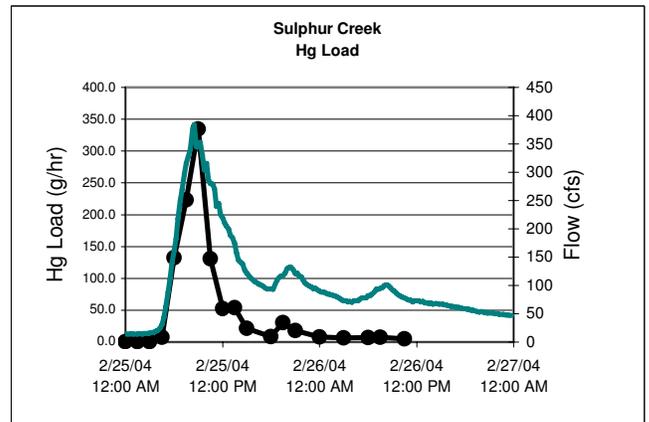


Figure 2.6 Total Mercury Loads Compared to Flow in Sulphur Creek Collected by a Sigma Autosampler.

2.5 Methylmercury Exports from Sulphur Creek

Sulphur Creek exports methylmercury to Bear Creek where fish have elevated concentrations of methylmercury. Approximately 41% of the total methylmercury load in Bear Creek comes from Sulphur Creek (CVRWQCB, 2004).

Methylmercury samples were collected at the Sulphur Creek USGS stream gauge during several sampling events that took place between 2000 and 2004 (CVWQCB, 2004 and data this report; Domagalski *et al.* 2004; Slotton *et al.* 2004a; Suchanek *et al.* 2004) in order to estimate

methylmercury loads. Methylmercury concentrations range between 0.06 and 20.6 ng/L, with an average of 2.5 ng/L (Bear Creek concentrations average 0.65 ng/L at Hwy 20). The highest concentrations were measured in the months of July and August. A positive relationship does not exist between methylmercury concentrations and flow so loads could not be estimated using regression analysis. To determine methylmercury loads the mean concentration from all samples collected at the gauge site was multiplied by average annual flow. Methylmercury loads exported out of Sulphur Creek range between 4.3 and 10.0 g/yr (Table 2.6).

Table 2.6 Sulphur Creek Methylmercury Loads

Water Year	Yearly Flow (ac-ft/yr)	MeHg Load (g/yr) (a)
2000	2254	8.0
2001	1439	5.6
2002	2771	8.4
2003	3307	10
Average	2443	8.0

a. MeHg loads for water years 2000 and 2001 were calculated using an average methylmercury concentration of 3.3 ng/L (N = 17 samples), which was also used to calculate loads in the Bear Creek TMDL for Bear Creek and its tributaries. More data became available after the Bear Creek TMDL was completed. MeHg loads for water years 2002 and 2003 were calculated using this larger dataset (N = 26), which had an average methylmercury concentration of 2.5 ng/L.

Methylmercury samples were also collected throughout the Sulphur Creek watershed at the same sites as total mercury samples; however, too few data are available to estimate loads or to determine areas of methylation. Methylmercury samples from all of the tributary inputs range between 0.3 and 1.8 ng/L (one Jones Fountain sample contained 13.5 ng/L) while samples in the mainstem range between 0.6 and 1.9 ng/L methylmercury.

3 NUMERIC TARGET

3.1 Definition of a Numeric Target

Numeric targets are the specific goals for the TMDL that will enable the protection of the Sulphur Creek beneficial uses. The numeric targets for this TMDL are based on naturally occurring levels of mercury in sediment and water in the creek and are intended to return the watershed to preanthropogenic conditions. Through the Basin Plan Amendment process, Staff is proposing a water quality objectives based on the natural or background concentration of mercury in the Sulphur Creek watershed. Staff's recommended water quality objectives are the TMDL targets.

3.2 Uses of Sulphur Creek

Beneficial uses of Cache Creek, which the Central Valley Water Board may apply to Sulphur Creek, were shown in Table 1.1. The following paragraphs discuss each beneficial use category and current activities in Sulphur Creek.

Municipal, Domestic, and Industrial Supply

Staff is unaware of any direct municipal and domestic supply use of water from Sulphur Creek since 1975⁵. The Wilbur Hot Springs resort obtains drinking water from shallow groundwater wells on a ridge above Sulphur Creek. Sulphur Creek flows to Bear Creek and into Cache Creek, which is designated for municipal and domestic supply. However, Sulphur Creek is estimated to provide less than one percent of the flow volume of Cache Creek at the town of Yolo (CVRWQCB, 2004). There are no industrial uses of Sulphur Creek water. Existing, natural concentrations of total dissolved solids and mercury from thermal springs exceed applicable water quality criteria for MUN use. Exceedances of MUN criteria and modification of Sulphur Creek's beneficial use designations to reflect natural conditions are described in the Basin Plan Amendment Staff Report for beneficial use modification and establishing site specific water quality objectives (CVRWQCB, 2007).

Stock watering

Sulphur Creek is used for stock watering. Cattle graze in the watershed upstream of Wilbur Hot Springs and drink from Sulphur Creek. There are no other agricultural uses of Sulphur Creek water.

⁵ The Federal Clean Water Act became law in 1975. This date is used as a benchmark for defining existing uses of a waterbody. Conditions or uses existing in or after November 1975 must be protected and maintained.

Wildlife Habitat

Sulphur Creek provides some wildlife and aquatic habitat. Terrestrial mammals, such as wild boar, raccoon, coyote and deer drink from the creek. Staff has observed California newts, frogs, snakes, and turtles in the creek.

Fish Spawning, Reproduction and/or Early Development

Cache Creek is designated as habitat for spawning and early development of anadromous fish species in cold (salmon and steelhead) and warm water (American shad, striped bass, and sturgeon). Sulphur Creek does not provide water of sufficient quantity and quality for spawning by these species (Moyle, 2005). Low water flow, high year-round temperatures, and high mineral content from the geothermal springs would deter their spawning.

Warm Freshwater Habitat

Low summer flows and heat and high dissolved solids from geothermal inputs, and high suspended solid concentrations in winter storms limit Sulphur Creek use by fish. In May 1998, one California roach was caught from Sulphur Creek near the Bear Creek confluence for analysis of mercury (Slotton *et al.*, 2004a). This fish may have originated in Bear Creek. In April 2004, staff from the DFG and the Central Valley Water Board electroshocked Sulphur Creek from Jones Fountain of Life to the confluence with Bear Creek in order to evaluate its aquatic resources (DFG, 2004). No fish were found. UC Davis fisheries biologist Peter Moyle has examined Sulphur Creek a number of times and also observed no fish (Moyle, 2005).

Aquatic Life

Sulphur Creek provides habitat for invertebrates. UC Davis researchers evaluated mercury in benthic macroinvertebrates collected from Sulphur Creek near the gauge site in 1996 and in 2000-2001 (Slotton *et al.*, 1997; 2004a). USGS scientists collected macroinvertebrates upstream of Wilbur Springs in 1997 and 1998 (Schwarzbach *et al.*, 2001). Benthic macroinvertebrates have been identified from the following taxa: Naucoridae (creeping water bugs) and nymphs or larvae of zygoptera (damselflies), ephemerelellidae (mayflies), siphonuridae (swimming mayflies), hydropsychidae (net caddis flies), and sialidae (alderflies). Benthic invertebrates and the corresponding adult stages of insects may provide food for nesting birds. USGS researchers hypothesized that brine flies, which are abundant around Sulphur Creek in the summer, were likely prey of killdeer nesting nearby.

Contact and Non-Contact Recreation

Humans do not fish in Sulphur Creek because fish and other aquatic organisms potentially consumed by humans are lacking. The Wilbur Hot Springs resort proprietors have not observed angling in the watershed. Geothermal waters from Wilbur Hot Springs and other springs are used for bathing. The pools and tubs are connected directly to the hot springs and are not filled

with water drawn from the creek. Bathing in natural hot spring water is an established recreational use. Non-contact recreational uses of Sulphur Creek such as hiking and aesthetic enjoyment also exist.

3.3 Numeric Targets

3.3.1 Justification for Proposal of a Natural Background Target

This TMDL proposes numeric targets for mercury in sediment and water based on natural or background concentrations. The targets are appropriate because there are significant natural inputs of mercury to Sulphur Creek that are unrelated to anthropogenic activities. These inputs from naturally enriched soils and geothermal springs cause mercury levels in Sulphur Creek to be elevated relative to most water bodies in the Central Valley.

Geothermal inputs are a natural feature of the creek that existed prior to mining and development activities. At the Wilbur Hot Springs Resort, water from two geothermal springs is piped into the resort pool and baths and flows back to the creek. These springs are located on the bank of Sulphur Creek and would have flowed directly to Sulphur Creek prior to construction of the resort. Fluid from other springs bubbles up into the stream bed or flows directly into the creek from an adjacent orifice.

Aquatic life in Sulphur Creek has presumably adapted to the high mineral content and temperatures caused by inputs from the geothermal springs. It is unknown whether the creek's biotic assemblage changed following construction and operation of the road, mines, and resort. The intent of this TMDL and the natural background target is to return the creek to preanthropogenic conditions. Implementation of the TMDL should improve water quality and potentially expand the variety of aquatic species using Sulphur Creek, as well as reducing loads and improving water quality in Bear Creek.

Establishing water quality standards based on natural background conditions are permissible under the USEPA's Water Quality Regulations. Section 131.10, Subparagraph (g) of the Code of Federal Regulations states the following:

“States may remove a designated use which is not an existing use, as defined in Section 131.3, or establish sub-categories of a use if the State can demonstrate that attaining the designated use is not feasible because: (1) Naturally occurring pollutant concentrations prevent the attainment of the use. (40 CFR 131.10).

In Sulphur Creek, naturally occurring concentrations of mercury in the water prevent attainment of existing drinking water quality objectives. Staff determined that for this TMDL, the numeric targets should be based on natural background conditions. The implementation plan (see Section 7) is designed to meet the targets. Staff intends that these targets be adopted with a Basin Plan Amendment for Sulphur Creek that recognizes that MUN and human consumption of aquatic organism uses do not apply. The numeric targets described below will protect all remaining beneficial uses of Sulphur Creek. They will also protect all beneficial uses in Bear and Cache Creeks.

3.3.2 Low Flow Aqueous Mercury Target

Sulphur Creek flows can be categorized into two regimes, depending on whether the water is mainly from springs (low flow) or is a mixture of spring and precipitation runoff (high flow). During summer and fall, water and mercury in lower Sulphur Creek are mainly from the springs. Creek concentrations of mercury are driven by the high concentrations of mercury discharged from the springs (See Section 2.3.5). The low flow target is the maximum mercury concentration, rounded, in unfiltered samples collected near the USGS gage in lower Sulphur Creek, which is 1,800 ng/L. Low flow conditions are defined as flow less than three cubic feet per second.

3.3.3 High Flow Sediment Mercury Target

During high flows, concentrations of mercury in the creek are influenced most significantly by the amount of mercury-containing sediment and soil entering in runoff. Even soil in non-mineralized zones of the watershed (non-mined) contains a base or regional background level of mercury. Note that aqueous mercury samples are analyzed without filtering the samples, which means that a concentration measurement in ng mercury/L describes the amount of mercury dissolved (small percentage) and the amount bound to particles (See Table 1.2). The greater the degree of erosion, the greater will be the level of fine-grained sediment and, therefore, the level of mercury in the creek. Because the mercury concentration varies with flow, a single target concentration of mercury in water in the creek cannot be used to describe high flow conditions. Instead, the high flow target is based on the concentration of mercury in fine-grained sediment.

As described in Section 2.3.4, the ratio of the concentration of mercury to the concentration of suspended sediment in water is a measure of the level of mercury contamination of the sediment. The ratio is calculated as aqueous concentration of mercury divided by aqueous concentration of suspended sediment:

$$\frac{\text{ng mercury/L water}}{\text{mg suspended sediment/L water}} = \frac{\text{ng mercury}}{\text{mg suspended sediment}}$$

The Hg/TSS ratio can be expressed as ng/mg, mg/kg, or parts per million (ppm).

As shown by the data collected by an autosampler through a storm (Figure 2.4), the initial runoff is associated with a peak in the Hg/TSS ratio. This peak likely represents mobilization of geothermal precipitates when flows are just beginning to increase. The Hg/TSS ratio then declines to a fairly consistent level for the rest of the storm. The bulk of suspended sediment transported during high flow likely comes from mercury mine waste and contaminated stream banks. As these sources are controlled, Staff anticipates that the Hg/TSS ratio will be significantly lower than existing conditions.

The maximum measured Hg/TSS ratio is 116 mg/kg during high flow conditions defined as greater than 3 cfs (N = 18; Appendix F). The dataset used for the high flow target is comprised

of grab samples collected within high flow events. This dataset excludes the autosampler data (Appendix G), which characterized one storm with 24 samples.

The load allocations (Table 5.1) require that discharges from mine sites and soil eroding into the creek be controlled, resulting in a 75% reduction in total mercury loads. Erosion control in the implementation plan will be focused on areas with the highest levels of mercury in soil: the mines and eroding areas that have higher levels of mercury in soil than the regional background (0.1-0.3 mg/kg; Churchill and Clinkenbeard, 2004). Controlling erosion from these areas will reduce the level of mercury contamination in sediment in the creek.

To calculate the high flow target, the reduction in loads is applied to the maximum Hg/TSS ratio. Central Valley Water Board staff estimates that remediation of the mine sites would reduce mercury loads from the mines to the creek by approximately 95% (this is not 100% because these sites likely were naturally mercury-enriched above regional background prior to mining). To account for this, the average Hg/TSS ratio was reduced by 71% (95% of the estimated contribution of mercury load from mine sites and other erosion that will be controlled) to 35 mg/kg to represent natural conditions prior to mining⁶. The high flow target is the ratio of mercury to total suspended sediment of 35 mg/kg, evaluated as an instantaneous maximum.

3.4 Potential Cleanup Goal for Soil from Mineralized Zones

Concentrations of mercury in undisturbed soil on and adjacent to the mine sites are expected to be higher than the regional background level. As described by State geologists Churchill and Clinkenbeard,

“The natural hydrothermal processes that form mercury deposits typically enrich the surrounding host rocks in mercury for some distance outward from the deposit. These distances may range from less than a meter to hundreds of meters and the degree of enrichment in mercury content is often one to two orders of magnitude above the natural regional background...Weathering of these enriched mercury rocks produces elevated mercury regolith (unconsolidated material overlying solid rock) that may be subject to erosion and transport through the watershed.”

Churchill and Clinkenbeard, 2004, page 11.

Homestake Mining Company has mapped the mineralized zone around mines in the lower Sulphur Creek valley. Concentrations of mercury in soil were 1.6-3.2 mg/kg at the periphery of the mineralized zone. Smaller pockets were found containing at least 15 mg/kg mercury in the mineralized zone bounding the creek (West End, Cherry Hill, Empire, Manzanita and Central Mines) and at least 30 mg/kg at Wide Awake Mine (Percy and Petersen, 1990). Concentration patterns followed the trend of faults underlying the Wilbur Springs area (Percy and Petersen, 1990). Churchill and Clinkenbeard (2004) collected samples of soil believed to have been undisturbed by mining (i.e., local background) at Clyde, Elgin, and the Sulphur Creek valley mine sites and found mercury concentrations ranging from 0.79 mg/kg to 330 mg/kg.

⁶ The calculated value of 34 mg/kg was rounded to the nearest multiple of five.

Data are lacking to propose final cleanup goals for the mineralized zones. As described above, mineralized zones at each mine site vary in terms of range of concentrations and soil types. Local background samples collected from the Elgin mine site all contained greater than 100 mg/kg mercury, suggesting that the extent of the zone and minimum concentrations in the Elgin mineralized zone are not known. A first step to development of a cleanup plan for each mine will likely be to map soil mercury concentrations in detail. From a soil concentration map and analysis of erosion potential, estimates of loads from the local background soil could be made for each mine site.

A potential cleanup goal for mercury in soil transported off of the Sulphur Creek mine areas is 3 mg/kg, which is approximately double the concentration found at the periphery of the mineralized zone in the lower watershed (Percy and Petersen, 1990). This potential goal should be refined when soil data are gathered for each mine site. Cleanup goals should apply to fine-grained sediment collected in mine runoff and from the stream bed below the mine sites.

3.5 Numeric Target Summary

The TMDL numeric targets are 1,800 ng/L unfiltered mercury in water during low flow (less than three cubic feet per second) and 35 mg/kg mercury in fine grained sediment, measured as the ratio of aqueous mercury to total suspended sediment during high flow conditions (greater than three cubic feet per second). To evaluate attainment of the targets, samples should be collected near the mouth of Sulphur Creek. The targets are based on natural, background levels of mercury in the Sulphur Creek watershed. A potential cleanup goal for mercury in soil transported off of the mine areas is 3 mg/kg. This cleanup goal may be refined for individual mine sites if more specific data are gathered.

4 LINKAGE ANALYSIS

The goals of the Sulphur Creek Mercury TMDL are to reduce mercury loads coming from anthropogenic activities in the watershed and to reduce inorganic and methylmercury loads exported to Bear Creek from Sulphur Creek. The purpose of the linkage analysis is to describe the relationship between inorganic mercury and methylmercury.

Quantitative links between inorganic mercury and methylmercury in water, and between water and sediment concentrations cannot be made with available data. Total mercury load reductions in Sulphur Creek are needed to reach pre-mining conditions. Staff expects that reducing total mercury loads will reduce mercury sediment concentrations and result in a methylmercury load reduction. Methylmercury production in sediment is the first step in a complex process that culminates in elevated levels of methylmercury in water and biota.

4.1 Methylmercury Production

Methylmercury concentrations are the result of two competing processes, methylation and demethylation. Methylation is the addition of a methyl group to an inorganic mercury molecule (Hg^{+2}). Sulfate reducing bacteria are the primary agents responsible for the methylation of mercury in aquatic ecosystems (Compeau and Bartha, 1985; Gilmour *et al.*, 1992). Maximum methylmercury production occurs at the oxic-anoxic boundary in sediment, usually several centimeters below the surface. Methylmercury fluxes from the sediment to the overlying anaerobic water and mercury becomes available to the biotic community when contaminated bottom water is mixed into the overlying water column. The fact that methylmercury is always measurable in Sulphur Creek implies that the rate of methylation is greater than demethylation.

Factors controlling methylmercury production in sediment have been the subjects of intense scientific research. (For reviews, see Wiener *et al.*, 2003 and Benoit *et al.*, 2003.) Sediment factors and landscape events important in net methylmercury production include the percent organic content of the sediment (Krabbenhoft *et al.*, 1999; Miskimmin *et al.*, 1992; Hurley *et al.*, 1998; Heim *et al.*, 2004; Slotton *et al.*, 2004b), pH and sulfate concentration of the overlying water (Gilmour *et al.*, 1998; Miskimmin *et al.*, 1992; Krabbenhoft *et al.*, 1999), creation of new water impoundments (Verdon *et al.*, 1991; Bodaly *et al.*, 1997), and the amount and kind of inorganic mercury present in the sediment (Krabbenhoft *et al.*, 1999; Bloom, 2004). Neither the organic content of the sediment or pH of the overlying water appears controllable in the Sulphur Creek watershed and are not discussed further.

4.1.1 Sulfate in the Mercury Cycle

Streams associated with mercury mine drainage, such as Sulphur Creek, have elevated sulfate concentrations (Rytuba, 2000). The combination of high mercury and sulfate concentrations in water provides an ideal environment for sulfate-reducing bacteria to methylate mercury. Additions of sulfate to sediment have been observed to both stimulate (Gilmour *et al.*, 1992; King *et al.*, 2002) and inhibit (Benoit *et al.*, 1999a; Gilmour *et al.*, 1998) methylmercury

production, depending on sulfate concentrations and sulfate/sulfide ratio. Sulfate promotes mercury methylation within mine wastes as well as where the mine drainage meets the stream water (Rytuba, 2000). Rytuba (2000) suggests that diverting water from mine waste will decrease methylation within the wastes and minimize mercury and methylmercury runoff.

4.1.2 Sediment Mercury Concentrations

The production of methylmercury in sediment has been found to be a function of the total mercury content of the sediment. Heim and colleagues (2004) report a weak positive correlation between methylmercury and total mercury in sediment ($r^2 = 0.19$, $n = 99$, and $p < 0.01$) across the Sacramento-San Joaquin River Delta. The correlations improve markedly when data are plotted by habitat type (e.g., stream, wetland, or open water). Other studies cited in the Cache Creek Mercury TMDL detail statistically significant, positive relationships of methylmercury to total mercury in sediment (Krabbenhoft *et al.*, 1999; See also CVRWQCB, 2004). In laboratory studies in which mercury was added to sediment and subsequent methylmercury production was measured, the efficiency of conversion of mercury to methylmercury was linear before approaching the asymptote or declining (Bloom, 1994; Rudd *et al.*, 1983). Efficiency decreased when sediment mercury concentrations were greater than 1-10 mg/kg. These results suggest that control programs that are able to successfully reduce total surficial sediment mercury concentration will also reduce the production and flux of methylmercury to the overlying water. Much greater reductions in total mercury may be required to achieve similar reductions in aqueous methylmercury when sediment concentrations exceed one mg/kg total mercury.

4.1.3 Mercury Forms

Mercury present at the Sulphur Creek mines is predominantly in mercury sulfide (cinnabar) form (Churchill and Clinkenbeard, 2004). Cinnabar is believed to be the least soluble and most inert of the mercury species. Sediment samples from Cache Creek containing cinnabar were among various mercury source types incubated in the laboratory to ascertain their methylation potential. Mercury mine waste was about 20 times less efficiently converted to methylmercury than was dissolved mercury²⁺, the most available form of mercury (Bloom, 2004). However, mine waste, in spite of its low conversion efficiency, produced large amounts of methylmercury in the laboratory because of its high total mercury content.

The ratio of methyl to total mercury in bulk surficial sediment is assumed to be a field measure of methylation efficiency (Gilmour *et al.*, 1998; Krabbenhoft *et al.*, 1999; Bloom *et al.*, 1999; Bloom, 2004). Heim and others (2004) collected sediment from sites in the Cache Creek watershed on three occasions (October 1999, May 2001, and October 2001) to measure methyl and total mercury concentrations and determine methylation efficiency. The highest total mercury concentrations were observed in sediment from Harley Gulch and Sulphur Creek. Sediment methylmercury concentrations were also very elevated at these same locations. However, consistent with the findings of Bloom (2004), methylation efficiency was low. This may be because of the high total mercury concentration (see previous section on the effect of total mercury on methylmercury production) and/or because the material is still mostly insoluble cinnabar.

4.2 Mercury Mobilization by Mine Drainage

Water flowing through adits, waste rock and tailings piles can solubilize and increase the transport of mercury beyond the inputs from erosion of mercury-containing soil and rock particles. Water flowing through the mine workings and rock piles, termed mine drainage, can be geothermal in origin or a combination of geothermal, freshwater spring, and infiltrated rainfall. Both mercury and methylmercury occur in low to moderate concentrations within mine drainage (Rytuba, 2000). Elevated concentrations of sulfate associated with mercury mine drainage promote methylmercury production within the drainage as well as in the receiving water.

As water exits mine workings, the drainage flows through calcined tailings and waste rock where it dissolves more soluble mercury (Rytuba, 2000). Mercury and methylmercury concentrations increase as water flows through mine waste and calcined material that was usually dumped close to mine workings. In the Sulphur Creek watershed, mine drainage occurs at the Elgin site.

When drainage from mine workings enters the stream, the reaction with oxygen and iron causes iron oxyhydroxide to precipitate, allowing mercury and methylmercury to adsorb to the precipitated matter (Rytuba, 2000). Rytuba (2000) reports that the dissolved fractions of both mercury and methylmercury decrease downstream from mine sites and that movement of mercury is mostly in the particulate phase. Iron oxyhydroxides accumulate in instream sediment during low flow summer months and are disturbed and redeposited downstream during storm events.

4.3 Mercury Control Programs

Mercury control programs in other water bodies have emphasized a combination of decreasing/eliminating mercury loads and natural burial of contaminated sediment. Decreasing or eliminating mercury loads is usually the first measure undertaken. This step is critical because it begins to reduce sediment mercury levels and the stock of new mercury to be methylated. Dredging and removal of contaminated sediment or capping with clean material has been employed less often than natural burial; presumably this is because of cost (Rudd *et al.*, 1983; Francesconi *et al.*, 1997).

Mercury concentrations in fish at contaminated industrial sites decline after control measures are instituted that reduce incoming mercury loads. The initial decrease in fish tissue concentration near the contamination source is often fast, with about a 50 percent decline in the first five to ten years. However, after the initial decrease, concentrations tend to stabilize with little, if any, subsequent decline (Turner and Southworth, 1999; Takizawa, 2000; Lodenius, 1991; Lindstrom, 2001; Francesconi *et al.*, 1997).

No published reports were found on remediation of pollution from mercury mining. The long duration of mining in the Sulphur Creek watershed coupled with the extensive distribution of contamination may make recovery slower than at industrial sites. Proposed control measures for

Sulphur Creek are similar to what have been employed in other mercury-contaminated watersheds. The California Bay Delta Authority and other entities are studying factors that affect the microbial methylation cycle with a goal of evaluating whether it is possible to interrupt or slow the cycle. Improvements in methylmercury control measures will be reviewed by staff and incorporated into the implementation plan.

4.4 Linkage Analysis Summary

Studies have shown statistically significant linear relationships between methyl and total mercury where methylmercury in sediment is a function of its total mercury content. Significant total mercury loads enter Sulphur Creek, which result in increased instream methylmercury production. As a result, Sulphur Creek exports considerable loads of mercury and methylmercury to Bear Creek. Reducing total mercury loads from identified sources will lead to reduced methylmercury loads in Sulphur and Bear creeks. Proposed mercury control measures for the Sulphur Creek watershed to reduce/eliminate discharge from mine sites, contaminated stream banks, and other inputs are similar to those that have been employed elsewhere. Implementation activities for Sulphur Creek are discussed further in Section 7.

5 LOAD ALLOCATIONS

As described in the linkage analysis, reductions in total mercury loads are needed to restore the watershed to conditions prior to mining. Reductions in total mercury loads from Sulphur Creek are also needed to reduce loads of mercury and methylmercury in Bear Creek. The first part of this section describes Staff's estimate of mercury loads by source types, based on details in the Source Analysis. The second and third parts delineate load allocations of total mercury and methylmercury, respectively.

5.1 Assessment of Mercury Loads by Source Type

Staff combined the tributary budget (Table 2.2) with estimates of geothermal and erosion inputs to develop an estimate of mercury loads as divided by source types. This source type and tributary budget is provided in Table 5.1. An analysis by source type is useful for allocating loads between the various sources. The source types evaluated are mines/mineralized areas on tributaries, geothermal springs, erosion of non-mineralized soil, mine areas and associated contaminated streambed, and atmospheric deposition⁷.

The average annual mercury load from outside of the named mine sites is assumed to be 1.2 kg/year. This assumption describes water years with average flows and/or storm events. Following extreme erosion events or flooding, loads from these areas would be higher. Staff's load estimate is similar to the low estimate of non-mine site runoff load by Churchill and Clinkenbeard (2004; See Section 2.3.2), which was 0.9 kg/year. Staff's non-mine erosion estimate includes 0.3 kg/yr⁸ of the load estimated for the upper watershed, which may originate from resuspension of contaminated stream bed sediment downstream of Elgin or East Branch mine sites or geothermal springs that have not been monitored.

Contributions from the mines on monitored tributaries, Clyde, Elgin and Wide Awake, are taken directly from Table 2.2. Although each tributary drains a small watershed as well as the mine site, most of the loads are thought to originate from the mine sites. Mercury loads from the Elgin site likely derive from a combination of erosion of mine waste, geothermal springs, and interaction of geothermal water as it flows through the mine workings and waste piles. The extent of the mineralized zone at Elgin is unknown. Stream sediment samples collected between the top of the ridge above Elgin and the uppermost of the water collection sites at Elgin, however, showed a significant decrease in sediment mercury concentrations with distance upstream, away from the mine site. The tributary upstream of Wide Awake Mine has not been sampled. Presumably as for the Clyde and Elgin sites, most of the mercury load from the Wide Awake tributary originates from the Wide Awake mine site.

⁷ No new load data are provided in Section 5.1. Section 2 presents mercury load estimates that are based on concentration data collected downstream of identifiable inputs and at tributary mouths. In Section 5.1, these load estimates are regrouped and presented based on major source at these input sites.

⁸ 1.2 kg/yr (Table 2.2) – 0.9 kg/yr.

Mercury loads measured instream above and below mines in the lower Sulphur Creek watershed were shown in Table 2.2. Mercury sources in these stretches include erosion of contaminated stream bed, banks and floodplain, erosion from waste piles and other mine features above the floodplain, and geothermal springs. The geothermal estimate from Section 2.3.5 (1.4 kg/year) is shown separately in Table 5.1. This geothermal input is subtracted from the mine-related load estimate for the lower watershed. It is not possible to separate the loads from “new” inputs from the terrestrial portions of the mine sites from floodplain and stream bed inputs. Operations at West End, Cherry Hill, Central, Empire and Manzanita mine sites resulted in ore, tailings and/or waste rock being deposited within the Sulphur Creek floodplain (Churchill and Clinkenbeard, 2004; Tetra Tech, 2004). Mercury eroding from mine features above the floodplain may be redeposited below and take more than one year to reach the creek (Churchill and Clinkenbeard, 2004). Because of the deposition and remobilization, it may not be necessary to separate these loads further for remediation purposes. The lower watershed mine (except Wide Awake) and stream bed load estimate in Table 5.1 was calculated by adding the load estimates from Table 2.2 measured downstream of West End, Manzanita, Central and Empire mines and Wilbur Springs and subtracting the estimate for lower watershed geothermal loads.

Atmospheric deposition of mercury, both directly to the creek surface and indirectly to the rest of the watershed with transport in runoff, contributes an estimated 0.03 kg/yr to mercury loads at the USGS gauge. The atmospheric load is far smaller than estimates from other sources.

5.2 Allocations for Total Mercury Loads

Allocations of mercury loads are shown in Table 5.1. Allocations are based on the goal of eliminating inputs of mercury caused by anthropogenic activities, particularly mining. The allocations are presented as a percentage of existing loads. Loads are expected to fluctuate with the magnitudes of precipitation events and flow. Current and future load estimates for average water years are also provided.

In general, geothermal springs are considered natural (background) sources of mercury. Geothermal springs in the lower watershed (Wilbur, Jones Fountain, Blanck, Elbow and other unnamed springs) are assigned no load reduction. An exception is the springs at Elgin Mine that flow over mine waste before entering the West Branch Sulphur Creek. Historically, spring water flowed through the Elgin mine tunnels (Churchill and Clinkenbeard, 2004). Spring water (possibly a combination of geothermal fluid and infiltrating rainwater) reacts with the waste rock within the tunnels and on the slope below, increasing the waterborne concentrations of mercury and sulfate (Rytuba, 2000). Remediation at the Elgin site to meet the load reductions is expected to require at least partial treatment of the effect of spring flows on the mobilization of mercury. Tetra Tech (2004) has evaluated treatment options for the Elgin springs.

The sum of mercury loads from areas outside of the named mine sites is allocated 85% of existing loads. Natural erosion from the watershed outside of the named mine sites is exacerbated by grazing, road cuts or other anthropogenic activities. It is also likely that areas outside of the named mine sites contain mine waste that has been transported by erosion. This may be particularly true in the East Branch Sulphur Creek, where instream sediment

concentrations of mercury were relatively high (Figure 2.2). To adequately control mercury levels in the watershed, loads from the anthropogenic impacts of mine waste and increased erosion should be reduced. Further investigations are needed of stream bank deposits, particularly in the East Branch.

Table 5.1 Sulphur Creek Total Mercury Budget by Source Type and Load Allocations

Source	Current Load, kg/yr (a)	Load Allocation as percent of existing loads (b)	Future Load, based on current load estimates, kg/yr
Geothermal springs	1.4	100%	1.4
Non-mine site erosion	1.2	85%	1.0
Clyde Mine	0.4	5%	0.02
Elgin Mine	2.7	5%	0.13
Wide Awake Mine	0.8	5%	0.04
Lower Watershed Mines plus contaminated stream bed	5.3	5%	0.3
Atmospheric Deposition	0.03	100%	0.03
Sum	11.8	25%	2.9
(a) Based on estimates from data collected in 2000-2004.			
(b) Load allocations are expressed as a percentage of existing loads. For average water years, a comparison between current and future loads is given.			

The allocation for atmospheric deposition is equal to existing loads. Deposition from the atmosphere is minimal, relative to other loads in the watershed. Reducing mercury in the global atmospheric pool is beyond the scope of this TMDL. Staff anticipates that mine remediation will reduce atmospheric inputs from local and regional sources, but no estimates are available.

The goal for the mine sites is to eliminate all mercury inputs affected by mining. The load allocation assigned to each mine site is 5% of existing loads of total mercury⁹. These sites are: Clyde, Elgin, West End, Manzanita, Central, Empire, Cherry Hill, and Wide Awake Mines. The allocation to the mines is to ensure that inputs from the mines are reduced, within limits of technical achievement, to pre-mining conditions. The mine allocation applies to waste rock, tailings and ore piles, soil under processing sites, processing facilities and equipment, and other features impacted by mine operations. If geothermal waters interact with mine waste, as at Elgin, the mercury load in excess of the input from the spring alone must be controlled.

Alterations to geothermal springs in the watershed must not increase loads of mercury or methylmercury entering Sulphur Creek. This cap on existing loads applies to the Wilbur Hot Springs resort and any other future geothermal development, modifications or treatment operations.

⁹ As long as West End, Manzanita, Central, Empire, and Cherry Hill mines are owned by the same entity, the 95% allocation may be applied to the total input from these five sites. Rathburn, Rathburn-Petray, North Petray and South Petray Mines are addressed in the Bear Creek TMDL for Mercury.

5.3 Methylmercury Loads

As described in the Cache Creek, Bear Creek and Harley Gulch TMDL for Mercury, loads of methylmercury from Sulphur Creek should ultimately be reduced to 10% of existing loads in order to attain the fish tissue objectives for Bear Creek (CVRWQCB, 2005). The Cache Creek Basin Plan amendment staff report describes the methylmercury allocations for Sulphur Creek, Bear Creek upstream of the mercury impairment, and within the Bear Creek channel sum to the total allocation needed to meet the Bear Creek objectives (Table 5.2).

Methylmercury loads are a function of with total mercury loads. The total mercury allocations described in previous sections are intended to reduce loads of methylmercury in Sulphur and Bear Creeks.

Source	Existing Annual Load (g/yr)	Acceptable Annual Load (g/yr)	Allocation (% of existing load)
Bear Creek @ Bear Valley Road	1.7	0.9	50%
Sulphur Creek	8	0.8	10%
In channel production and ungauged tributaries	11.4	1	10%
		0.3 (a)	10% (a)
<i>Total of Loads</i>	21.1	3	15%
Bear Creek at Hwy 20 (b)	21.1	3	15%

- a. The allocation includes a margin of safety, which is set to 10% of the acceptable loads. In terms of acceptable annual load estimates, the margin of safety is 0.3 g/yr.
- b. Bear Creek at Highway 20 is the compliance point for Bear Creek and its tributaries.
- c. Source: Cache Creek Watershed Mercury Basin Plan Amendment, Central Valley Water Board Resolution R5-2005-0146.

6 MARGIN OF SAFETY AND SEASONAL VARIABILITY

6.1 Margin of Safety

The margin of safety for total mercury is implicit in the load allocations. A goal of this TMDL is to eliminate mercury inputs that resulted from mining, grazing, road development, and other human actions. Total mercury load estimates and allocations were separated on whether the mercury derived from background conditions or were exacerbated by anthropogenic activity. Implementation of this TMDL should restore Sulphur Creek to its natural condition with respect to mercury. Beyond eliminating the mercury loads related to anthropogenic activities, no additional margin of safety for total mercury is necessary.

The methylmercury allocation for Sulphur Creek contains a margin of safety of 10% of acceptable loads. The methylmercury load allocation is calculated to attain the fish tissue objectives for Bear Creek. The Bear Creek fish tissue objectives are expected to be attained when aqueous methylmercury concentrations in the creek average 0.06 ng/L. Bear Creek and its tributaries are assigned methylmercury load allocations 10% lower than what is needed to meet the 0.06 ng/L goal, in order to incorporate the margin of safety (CVRWQCB, 2005).

6.2 Seasonal Variability

Seasonal variability in total and methylmercury loads was accounted for in the source analysis and load allocations. Loads of mercury and methylmercury in Sulphur Creek fluctuate with the seasons. Average, annual loads of total mercury and methylmercury were estimated using concentration data collected throughout the year to account for the seasonal changes in transport of total mercury and methylmercury and methylmercury production. Loads were calculated first on a daily basis using daily flow data, then summed to determine annual loads. Winter precipitation increases the aqueous concentrations of sediment and total mercury entering the creeks through erosion and resuspension of sediment. Because flows are greatest during the storm season, total mercury and sediment loads (concentration X flow) are greatest in winter. Most of the total mercury enters Sulphur Creek during high flow events.

Like total mercury, loads of methylmercury are greatest in winter. In contrast to total mercury concentrations, however, concentrations of methylmercury are not closely associated with runoff and flow. Methylmercury production is typically higher during the summer. Aqueous methylmercury concentrations show peaks in early summer, when *in situ* production is greatest, and after the first storms, when methylmercury produced in the tributaries is flushed downstream (Figure 6.1; Slotton *et al.*, 2004a). Seasonal methylmercury concentrations in benthic invertebrates exhibit a pattern similar to that of the water (Slotton *et al.*, 2004a).

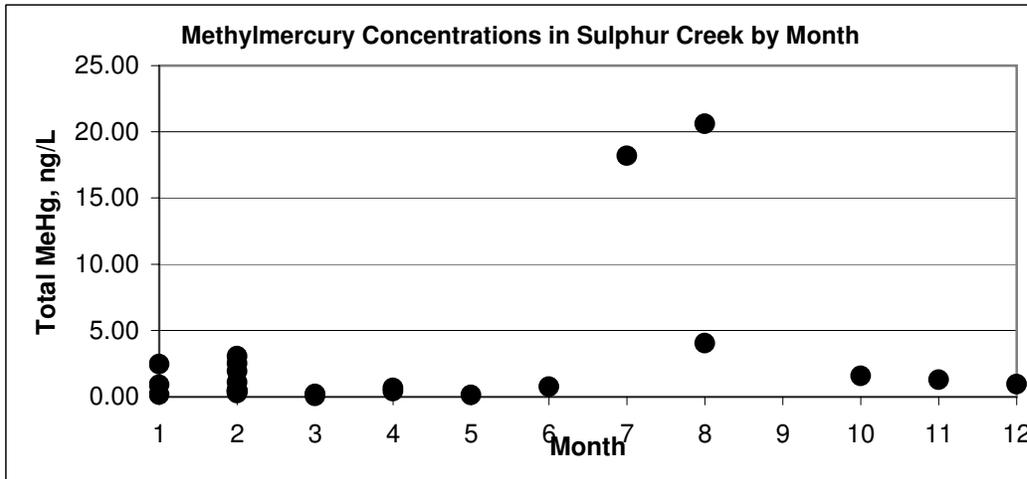


Figure 6.1 Aqueous Methylmercury Fluctuations by Month at the Sulphur Creek Gauge. Sources: Slotton *et al.*, 2004a and data collected by Central Valley Water Board Staff.

7 IMPLEMENTATION PLAN

The Sulphur Creek TMDL implementation plan is incorporated into the Cache Creek Watershed Mercury Basin Plan Amendment. During the Cache Creek Basin planning process, various projects, alternatives, and compliance time schedules were evaluated in accordance with the Porter-Cologne Water Quality Act, Section 13242. For details of the alternatives and planning process, please see the Staff Report for the Cache Creek Watershed Mercury Basin Plan Amendment (CVRWQCB, 2005).

The goals of the implementation plan are to reduce the mercury concentration in sediment within Sulphur Creek and to reduce the overall mercury loading to Bear Creek. The program includes these major components:

- 1) Reduce total mercury discharges from the mercury mine sites;
- 2) Reduce the concentration of mercury in Sulphur Creek sediment adjacent to and downstream of the mercury mines; and
- 3) Control erosion of contaminated sediments within the Sulphur Creek watershed where the total mercury sediment concentrations are greater than 0.4 mg/kg, dry weight.

Table 7.1 provides an outline of the sources of mercury and potential implementation actions for this TMDL. Text following the table describes the implementation actions in greater detail.

After remediations of mines and control of erosion, Bear and Sulphur Creeks will be monitored to ensure that total mercury and methylmercury levels have adequately declined. The Cache Creek Watershed Basin Plan Amendment requires periodic review and reporting to the Central Valley Water Board on progress of reducing the impairments. Staff will evaluate additional information regarding control of other factors that affect methylmercury production and incorporate them into the implementation plans if needed.

Table 7.1 Implementation Activities for Reducing Mercury in Sulphur Creek

Mercury Source	Potential Implementation Actions	Public and Private Stakeholders
Central, Cherry Hill, Empire, Manzanita, and West End mines	Waste discharge requirements or enforcement orders for inactive mine sites; control erosion in the stream banks downstream of the mines; evaluate BMPs ^a to reduce erosion and effects of grazing.	Private Landowners and/or responsible parties
Clyde, Rathburn, Petray, and Rathburn-Petray mines ^b	Waste discharge requirements or enforcement orders for inactive mine sites; control erosion in the stream banks downstream of the mines; evaluate BMPs to reduce erosion.	USBLM
Elgin Mine	Waste discharge requirements or enforcement orders for mine site; control erosion in the stream downstream of the mines; control discharge from spring-mine waste interactions, evaluate BMPs to reduce erosion.	Private Landowners and/or responsible parties
Wide-Awake Mine	Waste discharge requirements or enforcement orders for mine; control erosion in the stream downstream of the mines; evaluate BMPs to reduce erosion.	Private Landowners and/or responsible parties

Table 7.1 Implementation Activities for Reducing Mercury in Sulphur Creek

Mercury Source	Potential Implementation Actions	Public and Private Stakeholders
Geothermal Springs	Evaluate the feasibility of controlling mercury loads from geothermal springs.	USBLM, Colusa County, Private Landowners
Wilbur Hot Springs	Evaluate the feasibility of controlling mercury loads from geothermal springs.	Private Landowners
Sulphur Creek Streambed	Evaluate BMPs for erosion control; remove or stabilize contaminated sediment, stabilize banks, and revegetate.	USBLM, Private Landowners
Mercury Loads from Enriched Soil Outside of Mines	Evaluate BMPs to reduce erosion of soil with more than 0.4 mg/kg mercury; investigate and control hot spots in tributaries; evaluate BMPs to reduce erosion and effects of grazing; stream bank stabilization.	USBLM, Colusa County, Private Landowners
Deposition of Mercury from the Global Atmospheric Pool	No change from existing loads (local atmospheric deposition may decrease with mine waste remediation).	None
(a) BMPs- Best management practices. (b) Mercury from the mine waste piles and pits on the Rathburn-Petray and Rathburn sites is thought to discharge mainly to tributaries of Bear Creek (Churchill and Clinkenbeard, 2004; Tetra Tech, 2004). Because some activities on these properties, such as road cuts, operations prior to open pit mining, or prospects, may contribute mercury to Sulphur Creek, the Rathburn-Petray and Rathburn Mines are listed here. The Cache Creek Watershed Basin Plan Amendment requires that the entire mining-related loads from the Rathburn and Rathburn-Petray Mines be controlled, regardless of whether the discharge goes to the Sulphur Creek or Bear Creek.		

7.1 Mercury Mines

The Cache Creek Watershed Basin Plan Amendment describes actions to be taken by the Central Valley Water Board and responsible parties for the mines to ensure that load reductions for the mines are met. The Central Valley Water Board shall adopt cleanup and abatement orders or take other appropriate enforcement action for control of mercury discharge from the mines and contaminated stream bed and banks. Responsible parties will then develop and submit plans and schedules for cleanup. State Water Board Resolution 92-49 provides guidelines for requirements and content of cleanup plans and analysis of alternative cleanup methods. Cleanup actions at the mine should be completed by 2011.

Table 7.1 separates the mercury mines by current ownership (See Load Allocations section). Parties identified as responsible for cleanup may include entities involved in mining, not just current owners. Although cleanup requirements apply to each mine, a single owner or party having responsibility for adjacent mines may group them for cleanup. As stated in the Cache Creek Watershed Basin Plan Amendment, mercury mobilized by thermal springs passing through mine workings or waste rock is considered anthropogenic loading and must be controlled. This situation exists at Elgin Mine. Mine waste in the stream bed adjacent and directly downstream of the Central, Cherry Hill, Empire, Manzanita, and West End Mines in lower Sulphur Creek must also be controlled.

Specific control measures for each mine site will be determined when enforcement actions and cleanup plans are written. Cleanup plans may evaluate pre-mining concentrations within the mineralized zone and determine local soil background or cleanup levels. Mine remediation may be accomplished through a variety of actions including, but not limited to, surface water diversion, erosion control, landslide stabilization, regrading, waste pile containment, capping, relocation or removal, and revegetation. Cost-effective remediation of the mine sites will likely include excavation of highly-contaminated processing site soil, waste rock or tailings and surface water controls to reduce erosion of the regraded sites (Tetra Tech, 2004). Capping with a liner and clean soil and revegetation may also be warranted.

Engineering feasibility studies have been conducted for remediating the mines listed in Table 7.1 to reduce off-site movement of mercury (Tetra Tech, 2004). These feasibility studies are a resource for the evaluation of alternatives for the Sulphur Creek mines.

Staff estimated the feasibility of achieving the total mercury load allocations at the mine sites by remediation. As described in Section 2.3.2, Churchill and Clinkenbeard (2004) estimated current mercury loads from waste rock, tailings, and other mine features using probable erosion rates and existing mercury concentrations¹⁰. Staff repeated this exercise, assuming a mercury concentration in enriched soil of 3 mg/kg and the minimum and maximum erosions rates proposed for each mine feature by Churchill and Clinkenbeard (2004)¹¹. Although Staff used the estimate of current erosion rates from the mine waste and tailings piles, post-remediation rates would likely be much lower due to routing of surface water around the features and other surface water controls. Staff estimates that remediation of the mine sites could reduce annual mercury delivery from the Sulphur Creek sites to 0.09-0.3 kg/year, which is a 92-98% reduction from current delivery estimates (See Table 2.3 for comparison).

7.2 Erosion Control

The percent reduction for non-mine site erosion in Sulphur Creek is intended to be met by application of management practices to control erosion and trap eroded sediment, if necessary. The Cache Creek Watershed Basin Plan Amendment requires that landowners of soils with elevated mercury content implement erosion control practices (CVRWQCB, 2005). Attainment of the load allocation may require reducing the impacts of cattle grazing, stabilization of streambeds, and treatment of any “hot spots” that are identified.

¹⁰ Details on the area, erosion estimates and mercury levels of mine features can be found in Appendix N of the report by Churchill and Clinkenbeard (2004). <http://loer.tamug.tamu.edu/calFed/FinalReports.htm>

¹¹ Example estimate of annual delivery of mercury from the grass-covered waste rock pile on the Empire mine site (Churchill and Clinkenbeard, 2004): Area of waste rock pile is 0.68 acres. Estimated erosion rates using the Revised Universal Soil Loss Equation 2 (RULSE2) from this waste pile is 0.46-0.61 tons per acre per year. Average, existing mercury concentration in waste pile is 150 mg mercury/kg soil.

a) Minimum annual soil loss = 0.68 acres * 0.46 tons/acre-yr = 0.31 tons soil /year.

b) Minimum annual Hg loss = 0.31 tons soil/yr * 150 mg Hg/kg soil * convert from tons to kg = 0.04 kg Hg/year.

Substituting a mercury concentration of mg/kg in equation (b) results in a post-remediation minimum estimate of loads from the Empire mine site pile of 0.0009 kg Hg/year (Using the maximum erosion rate instead of minimum erosion rate results in an estimated future mercury load of 0.0012 kg/year).

The Sulphur Creek watershed is naturally enriched in mercury. The lowest concentration of mercury in soil in the watershed, as observed in areas distant from mines or springs, is in the range of 0.07-0.3 mg/kg, dry weight (Churchill and Clinkenbeard, 2004; Pearcy and Petersen, 1990). Staff considers 0.2 mg/kg to be the regional background mercury concentration. Soil in “mineralized zones”, including where deposits were worth mining, has higher levels of mercury. Concentrations of mercury in undisturbed, mineralized soil in the Sulphur Creek Watershed ranges 1-330 mg/kg (Churchill and Clinkenbeard, 2004).

Anthropogenic activities, including grazing, road construction and maintenance, and firewood collection activities typically increase erosion rates. To reduce mercury inputs, the Cache Creek Watershed Basin Plan Amendment requires that new and future anthropogenic activities to implement management practices that reduce erosion from mercury-enriched areas (defined as average concentration of 0.4 mg/kg or greater in fraction of sample that passes a 63-micron screen). To control erosion of soils containing elevated levels of mercury, these areas must first be identified for their mercury content and erosion potential. Central Valley Water Board staff will conduct additional studies to identify sub-watersheds with elevated mercury concentrations in soil and stream sediment. After areas with elevated soil mercury concentrations are identified, the Central Valley Water Board’s Executive Officer will require affected landowners and/or land managers to 1) submit reports that identify anthropogenic activities that contribute to erosion and 2) implement management practices to control erosion. Within the entire Sulphur Creek watershed, entities maintaining or constructing roads must implement management practices to control erosion from the roads (CVRWQCB, 2005).

Erosive areas containing mercury may need to be protected, stabilized, or removed to prevent continued erosion. The land management agencies (US Bureau of Land Management and Colusa County) should evaluate land management projects and practices with respect to erosion control efficacy. Staff will also review land management plans (including grazing, timber harvest, firewood collection, and maintenance of unpaved roads) with emphasis on erosional areas with elevated mercury in soils. It is recommended that the public land management agencies include erosion reduction goals in land management plans. Mine remediation projects may need to be protected from erosion due to grazing. Public and private landowners may coordinate watershed erosion control projects and are encouraged to develop a watershed approach to controlling erosion. Staff will assist to the extent possible with funding and grant opportunities.

Tetra Tech (2004) suggested the use of instream retention basins to trap contaminated sediments. Sediment transported downstream during storm events would be settled out in the detention structure. The trap could then be cleaned out and contaminated sediments could be moved off-site and buried.

7.3 Geothermal Sources

Geothermal springs that discharge mercury and sulfate, without any enrichment from passing through mine waste or workings, are generally considered to be natural sources and are not given

load allocations. It is possible that geothermal discharges are potential candidates for remediation or mercury offset projects.

The Wilbur Hot Springs contribute mercury and methylmercury to Sulphur Creek. The Wilbur Hot Springs resort routes springs that would otherwise discharge directly to the creek through a series of baths before returning the spring water to the creek. Thus the springs as currently used by the resort are considered natural sources. Further development of springs by the Wilbur Hot Springs resort or other entity must not increase methylmercury or total mercury loads to Sulphur Creek.

7.4 Atmospheric Inputs

The allocation for atmospheric deposition is capped at the maximum mercury load estimated to accumulate from the global atmospheric pool, which is 0.03 kg/year. Atmospheric mercury originating outside of the watershed is considered an uncontrollable source under this TMDL. As noted in the source analysis, atmospheric loads of mercury derive from global, regional, and local sources. Mercury from Sulphur Bank Mercury Mine is a regional atmospheric source that may deposit locally in the Sulphur Creek watershed. Local mercury flux from Sulphur Bank will be controlled by USEPA Superfund remediation activities at the mine site; therefore, there should be slightly less atmospheric loading from local sources after remediation.

8 PUBLIC PARTICIPATION

Staff sought public comments in workshops, hearings and other meetings and through written and email notification of the opportunities to comment. Public participation processes accompanied development of the Sulphur Creek TMDL Report and the two Basin Plan Amendments, which were for the load allocations and implementation plan (Cache Creek Watershed Mercury Basin Plan Amendment) and the site-specific water quality objectives (Sulphur Creek Modification of Beneficial Uses and Water Quality Objectives Basin Plan Amendment). Specific activities included:

- Data requests. Staff received data and background information for the TMDL report from the USEPA, USFWS, USGS, US Bureau of Reclamation, California Department of Fish and Game, California Department of Water Resources, California Department of Conservation, California Bay Delta Authority, Los Alamos National Laboratory, and Tetra Tech EM Inc.
- Mailing Lists. A notice of availability of the draft TMDL Report was sent to interested parties (e.g., federal, state and local agencies involved in the watershed, private landowners, members of the Cache Creek Stakeholders Group and any other local watershed groups, the Delta Tributaries Mercury Council (DTMC) and other interested groups and persons) by email and hard copy. Staff continued to add to and use the mailing lists for notifications about subsequent workshops, hearings, and availability of draft documents during the Basin Planning Processes. For the Cache Creek Watershed and Sulphur Creek Water Quality Objectives Amendments, staff also utilized an email listserv (“Lyris”) to which interested persons could subscribe on the through the Central Valley Water Board’s website.
- Document Availability. All documents related to the TMDL and Basin Planning processes were available in PDF format on the Central Valley Water Board’s website: <http://www.waterboards.ca.gov/centralvalley/programs/tmdl/Cache-SulphurCreek/index.html>. Paper copies were sent to interested persons upon request.
- Staff met with private landowners of potentially affected mine properties in April 2005.
- Forums with Delta Tributaries Mercury Council. Staff gave presentations and sought comment on the Cache Creek Mercury and Sulphur Creek TMDLs and the Cache Creek Watershed implementation plan at the Delta Tributaries Mercury Council (DTMC). Sulphur Creek. Monitoring and implementation activities of the Sulphur Creek TMDL fit within recommendations of the DTMC’s Strategic Plan for the Reduction of Mercury Related Risk in the Sacramento River Watershed (DTMC Strategic Plan¹²). Specifically, the DTMC Strategic Plan recommends monitoring soil samples in tributary watersheds with higher than average Hg/TSS, additional sediment and water monitoring to quantify mercury loads, planning of remediation projects that may serve as pilot projects for the Sacramento River Watershed, and development and implementation of public outreach.

¹² The DTMC Strategic Plan is available:
<http://www.sacriver.org/subcommittees/index.php?action=ShowNode&subcommittee=dtmc>

- Scientific Peer Review. The Sulphur Creek TMDL Report was part of the package provided to independent, scientific peer reviewers for both Basin Plan Amendments. Peer review comments and staff's responses were made available to the public on the website.
- Publication of Workshop and Hearing Notices. Notices of Public Workshops, CEQA Scoping Meetings, and Public Hearings were published in the Sacramento Bee and other local newspapers 45 days prior to the meetings.
- CEQA Scoping Meetings. Stakeholder comments were received at a public workshop and CEQA (California Environmental Quality Act) Scoping Meeting for mercury in the Cache Creek watershed. The public workshop was held in Woodland, CA on 4 June 2004. A second scoping meeting for the Sulphur Creek Water Quality Objectives Amendment was held in Colusa, CA on 28 September 2006.
- Public Workshop and Hearings. For the Cache Creek Watershed Mercury Basin Plan Amendment, staff held a workshop before the Central Valley Water Board on 18 March 2005 and public hearings on 23 June and 21 October 2005. The Central Valley Water Board is expected to consider adoption of the Sulphur Creek Beneficial Use and Water Quality Objective Amendment in March 2007.
- State Water Board Public Process. The State Water Board notifies the public through email and paper notices and newspaper publication of the hearing and associated documents when considering whether to approve amendments adopted by the Central Valley Water Board.

9 REFERENCES

All Central Valley Water Board documents cited are available on the CVRWQCB website:
http://www.waterboards.ca.gov/centralvalley/available_documents/index.html

- Ayers, R. S. and D. W. Westcot (1985) Water Quality for Agriculture. Rome, Food and Agriculture Organization of the United Nations - Irrigation Drainage Paper No. 29, Rev. 1.
- Barnes, I., W. P. Irwin, and H. A. Gibson (1975) Geologic map showing springs rich in carbon dioxide or chloride in California. Menlo Park, CA, U. S. Geological Survey Water Resources Investigations Open-File Map.
- Benoit, J. M., C. C. Gilmour, et al. (2003) Geochemical and biological controls over methylmercury production and degradation in aquatic ecosystems. Biogeochemistry of Environmentally Important Trace Elements. Y. Chai and O. Braids. Washington, DC, American Chemical Society: 262-297.
- Benoit, J. M., C. C. Gilmour, et al. (1999). "Sulfide controls on mercury speciation and bioavailability to methylating bacteria in sediment and pore waters." *Env. Sci. Technol.* 33: 951-957.
- Bloom, N. S., G. Gill, et al. (1999). "Speciation and cycling of mercury in Lavaca Bay, Texas, sediments." *Env. Sci. Technol.* 33: 7-13.
- Bloom, N. S. (2004). Solid Phase Mercury Speciation and Incubation Studies in or Related to Mine-site Runoff in the Cache Creek Watershed (CA), Frontier Geosciences Inc. Prepared for the California Bay Delta Authority Mercury Program. Available at: <http://loer.tamug.tamu.edu/calfed/FinalReports.htm>.
- Bodaly, R. A., V. L. St. Louis, et al. (1997). Bioaccumulation of mercury in the aquatic food chain in newly flooded areas. *Metal Ions in Biological Systems*, Vol. 34: Mercury and Its Effects on Environment and Biology. A. Sigel and H. Sigel. New York, Marcel Dekker.
- DFG (2004). Cruise Report for a Fish Survey of Sulphur Creek as part of the Total Maximum Daily Load Investigation for the Central Valley Regional Water Quality Control Board, California Department of Fish and Game, Moss Landing Marine Laboratories. Prepared by B. Jakl and G. Ichikawa.
- Churchill, R. K. and J. P. Clinkenbeard (2004). Assessment of the Feasibility of Remediation of Mercury Mine Sources in the Cache Creek Watershed. Task 5C1 Final Report, California Department of Conservation, California Geological Survey. Prepared for the CALFED Bay-Delta Program, Directed Action #99-B06. Available at: <http://loer.tamug.tamu.edu/calfed/FinalReports.htm>.
- Compeau, G. and R. Bartha (1985). "Sulfate-reducing bacteria: Principal methylators of mercury in anoxic estuarine sediment." *Applied Environmental Microbiology* 50: 498-502.
- CVRWQCB (1998). The Water Quality Control Plan (Basin Plan) for the California Regional Water Quality Control Board - Central Valley Region for the Sacramento River Basin and the San Joaquin River Basin. Fourth Edition. Sacramento, CA.
- CVRWQCB (2004). Cache Creek, Bear Creek, and Harley Gulch TMDL for Mercury Final Staff Report. Sacramento, CA, Central Valley Regional Water Quality Control Board. November.
- CVRWQCB (2005). Amendments to the Water Quality Control Plan for the Sacramento River and San Joaquin River Basins for the Control of Mercury in Cache Creek, Bear Creek, Sulphur Creek, and Harley Gulch, Final Staff Report with Environmental Documents and

- Resolution Number 2005-0146 adopting the Amendment. Sacramento, CA, Central Valley Regional Water Quality Control Board. October.
- CVRWQCB (2007). Amendment to the Water Quality Control Plan for the Sacramento River and San Joaquin river Basins to Determine Certain Beneficial Uses Are Not Applicable and Establish Water Quality Objectives for Sulphur Creek, Public Review Draft Staff Report. Sacramento, CA, Central Valley Regional Water Quality Control Board. January.
- Domagalski, J., C. N. Alpers, D. G. Slotton, T. H. Suchanek, and S. M. Ayers (2004). Mercury and Methylmercury Loads in the Cache Creek Watershed, California, January 2000 – May 2001. Final Report, U.S. Geological Survey; University of California Davis; and U.S. Fish and Wildlife Service. Prepared for the CALFED Bay-Delta Program, Directed Action #99-B06. Available at: <http://loer.tamug.tamu.edu/calfed/FinalReports.htm>.
- Foe, C. and B. Croyle (1998). Mercury Concentrations and Loads from the Sacramento River and from Cache Creek to the Sacramento-San Joaquin Delta Estuary. Sacramento, CA, Staff Report to the Central Valley Regional Water Quality Control Board.
- Francesconi, K., R. Lenanton, et al. (1997). "Long-term study of mercury concentrations in fish following cessation of a mercury-containing discharge." *Marine Env. Res.* 43: 27-40.
- Gilmour, C. C., E. A. Henry, and R. Mitchell (1992) "Sulfate stimulation of mercury methylation in freshwater sediments." *Env. Sci. Technol.* 26: 2281-85.
- Gilmour, C. C., G. Riedel, et al. (1998) "Methylmercury concentrations and production rates across a trophic gradient in the northern Everglades." *Biogeochemistry* 40: 327-345.
- Goff, F., D. Bergfeld, et al. (2001). *Geochemical Data on Waters, Gases, Rocks and Sediments from The Geysers-Clear Lake Region, California (1991-2000)*, Los Alamos Nat. Laboratory.
- Gustin, M. S., B. Fitzgerald, et al. (2000). *Atmospheric Mercury Emissions from Mine Waste. Proceedings, Assessment and Managing Mercury from Historic and Current Mining Activities. Extended Abstract*, San Francisco, U. S. Environmental Protection Agency, Office of Research and Development.
- Heim, W., K. Coale, and M. Stephenson (2004) *Methyl and Total Mercury Spatial and Temporal Trends in Surficial Sediment of the San Francisco Bay-Delta. Subtask 4 Final Report.*, California Dept. Fish and Game, Moss Landing Marine Laboratory. Prepared for the CALFED Bay-Delta Program, Directed Action #99-B06. Available at: <http://loer.tamug.tamu.edu/calfed/FinalReports.htm>.
- Hurley, J., D. P. Krabbenhoft, and L. Cleckner (1998) "System controls on the aqueous distribution of mercury in the northern Florida Everglades." *Biogeochemistry* 40: 293-311.
- King, J., S. Harmon, et al. (2002). "Mercury removal, methylmercury formation, and sulfate reducing bacteria profiles in wetland mesocosms." *Chemosphere* 46: 859-870.
- Krabbenhoft, D. P., J. G. Wiener, W. G. Brumbaugh, M. L. Olson, J. F. DeWild, and T. J. Sabin. (1999). A national pilot study of mercury contamination of aquatic ecosystems along multiple gradients. U. S. Geological Survey Toxic Substances Hydrology Program: proceedings of the Technical Meeting, Charleston, SC, March 8-12, 1999. *Water-resources Investigations Report: 99-4018 A-C*. West Trenton, N. J.: U. S. Dept. Interior, U. S. Geological Survey; Denver: Branch of Information Services (distributor): 147-160.
- Lindstrom, L. (2001). "Mercury in sediment and fish communities of Lake Vanern, Sweden: Recovery from contamination." *Ambio* 30: 538-544.
- Lodenijs, M. (1991). "Mercury concentrations in an aquatic ecosystem during 20 years following abatement of the pollution source." *Water, Air, and Soil Pollution* 56: 323-332.

- Marshack, J. B. (2003). A Compilation of Water Quality Goals. Sacramento, CA, Central Valley Regional Water Quality Control Board, Staff report. Available at: http://www.swrcb.ca.gov/rwqcb5/available_documents/index.html.
- Miskimmin, B., J. W. M. Rudd, and C. A. Kelley (1992). "Influences of dissolved organic carbon, pH, and microbial respiration rates on mercury methylation and demethylation in lake water." *Can. J. Fish. Aquat. Sci* 49: 17-22.
- Moyle, P. B. (2005). Personal communications from Peter Moyle, Professor, Department of Wildlife, Fish and Conservation Biology, University of California Davis, to Stacy Stanish, Environmental Scientist, Central Valley Regional Water Quality Control Board, regarding fish habitat and spawning in Sulphur Creek. 28 July 2004 and 5 January 2005.
- NADP (2000a). National Atmospheric Deposition Program 1998 Wet Deposition, NADP Data Report 2000-01. Illinois State Water Survey, Champaign, IL. Data available at: <http://nadp.sws.uiuc.edu/mdn>.
- NADP (2000b). National Atmospheric Deposition Program 1999 Annual Summary, NADP Data Report 2000-02. Illinois State Water Survey, Champaign, IL. Data available at: <http://nadp.sws.uiuc.edu/mdn>.
- Nichols, J., S. Bradbury, and J. Swartout. (1999). "Derivation of wildlife values for mercury." *Journal of Toxicology and Environmental Health*: 325-355.
- NRC (2000). Toxicological Effects of Methylmercury. Washington, DC, National Research Council, Committee on the Toxicological Effects of Mercury. National Academy Press.
- Pearcy, E. and U. Petersen (1990). "Mineralogy, geochemistry and alteration of the Cherry Hill, California hot-spring gold deposit." *Journal of Geochemical Exploration* 36: 143-169.
- Rudd, J. W. M., M. A. Turner, A. Furutani, A. L. Swick, and B. E. Townsend (1983). "The English-Wabigoon river system: I. A synthesis of recent research with a view towards mercury amelioration." *Can. J. Fish. Aquat. Sci* 40: 2206-2217.
- Rytuba, J. J. (2000). "Mercury mine drainage and process that control its environmental impact." *Science Total Environment* 260: 57-71.
- Schwarzbach, S., L. Thompson, and T. Adelsbach (2001). An Investigation of Mercury Bioaccumulation in the Upper Cache Creek Watershed, 1997-1998. USFWS Final Report, U.S. Fish and Wildlife Service, Environmental Contaminants Division, Sacramento Fish and Wildlife Office. Off Refuge Investigations Report FFS #1130 1F22. DEC ID #199710005.
- SFEI (2001). San Francisco Bay Atmospheric Deposition Pilot Study Part 1: Mercury, Prepared by the San Francisco Estuary Institute for the San Francisco Estuary Regional Monitoring Program, Oakland, CA.
- Slotton, D. G., S. M. Ayers, J. E. Reuter, and C. R. Goldman (1997) Cache Creek Watershed Preliminary Mercury Assessment, Using Benthic Macro-Invertebrates. Final Report, University of California, Davis, Division of Environmental Sciences.
- Slotton, D. G., S. M. Ayers, T. H. Suchanek, R. D. Weyand, and A. M. Liston (2004) Mercury Bioaccumulation and Trophic Transfer in the Cache Creek Watershed, California, in Relation to Diverse Aqueous Mercury Exposure Conditions. Subtask 5B. Final Report. University of California, Davis, Dept. of Env. Science and Policy and Dept. Wildlife, Fish and Conservation Biology. Prepared for the CALFED Bay-Delta Program, Directed Action #99-B06. Available at: <http://loer.tamug.tamu.edu/calfed/FinalReports.htm>.
- Slotton, D. G., S. M. Ayers, T. H. Suchanek, R. D. Weyand, A. M. Liston, C. Asher, D. C. Nelson, and B. Johnson (2004b) The Effects of Wetland Restoration on the Production and

- Bioaccumulation of Methylmercury in the Sacramento-San Joaquin Delta, California. Final Report., University of California, Davis, Dept. Env. Science and Policy, Dept. Wildlife, Fish and Conservation Biology and Div. Microbiology; and US Fish and Wildlife Service. Prepared for the CALFED Bay-Delta Program, Directed Action #99-B06. Available at: <http://loer.tamug.tamu.edu/calfed/FinalReports.htm>.
- Suchanek, T. H., D. G. Slotton, D. C. Nelson, S. M. Ayers, C. Asher, R. Weyand, A. Liston, and C. Eagles-Smith (2004) Mercury Loading and Source Bioavailability from the Upper Cache Creek Mining District. Subtask 5A. Final Report, US Fish and Wildlife Service, Division of Environmental Contaminants and UC Davis, Departments of Environmental Science and Policy and Microbiology. Prepared for the CALFED Bay-Delta Program, Directed Action #99-B06. Available at: <http://loer.tamug.tamu.edu/calfed/FinalReports.htm>.
- SWRCB (1999) 1998 California 303(d) List and Priority Schedule. Approved by U.S. Environmental Protection Agency, Region 9; May 12, 1999. Sacramento, State Water Resources Control Board.
- Takizawa, Y. (2000) "Minamata disease in retrospect." *World Resource Review* 12(2): 211-223.
- Tetra Tech EM, Inc.(2004) Engineering Evaluation and Cost Analysis for the Sulphur Creek Mining District, Colusa and Lake Counties, California. Subtask 5C2 Draft Report., Prepared for the CALFED Bay-Delta Program, Directed Action #99-B06. Available at: <http://loer.tamug.tamu.edu/calfed/DraftReports.htm>.
- Turner, R. R. and G. R. Southworth (1999) Mercury-contaminated industrial and mining sites in North America: an overview with selected case studies. *Mercury Contaminated Sites*. R. Ebinghaus, R. R. Turner, L. D. de Lacerda, O. Vasiliev and W. Salomons. Berlin, Springer-Verlag: 89-108.
- USEPA (1997) Mercury Study Report to Congress Vol. 4: An Assessment of Exposure to Mercury in the United States, Office of Air Quality Planning & Standards and Office of Research & Development, U.S. Environmental Protection Agency. EPA-452/R-97-006.
- USEPA (2000) US Environmental Protection Agency, Federal Register, Vol. 65, No. 97 (Thurs. 18 May, 2000). Water Quality Standards; Establishment of Numeric Criteria for Priority Toxic Pollutants for the State of California; Rule: 31682-31719.
- USEPA (2001) Water Quality Criterion for the Protection of Human Health: Methylmercury. Final Document. Washington, DC, US Environmental Protection Agency, Office of Science and Technology, Office of Water. EPA-823-R-01-001.
- USGS (2004) Stream flow data from the United States Geological Survey Sulphur Creek Stream Gauge Site # 11451690. Available from <http://ca.water.usgs.gov>.
- USGS (1991) Wilbur Springs, California. 7.5' Topographic Quadrangle, as presented by TopoZone.com (© 2000 Maps a la carte, Inc.). Accessed on February 27, 2001. (<http://www.topozone.com/default.asp>), United States Geological Survey.
- Verdon, R., D. Brouard, et al. (1991) "Mercury evolution (1978-1988) in fishes of the La Grande hydroelectric complex, Quebec, Canada." *Water, Air, and Soil Pollution* 56: 405-417.
- Wiener, J. G., D. P. Krabbenhoft, et al. (2003) Ecotoxicology of mercury. In: *Handbook of Ecotoxicology*. D. Hoffman, B. Rattner, G. Burton and J. Cairns, Eds. Washington, D. C., Lewis Publishers.
- Wolfe, M. F., S. Schwarzbach, and R. A. Sulaiman (1998) "Effects of mercury on wildlife: A comprehensive review." *Environmental Toxicology and Chemistry* 17(2): 146-60

APPENDIX A. FLOW DATA

The USGS operates one flow gauge on Sulphur Creek, about one mile upstream of the mouth. Data for this gauge can be accessed on the following website: <http://nwis.waterdata.usgs.gov/ca> (Site Code = 11451690). Summary flow data for the gauge are presented in Table 2.1 of the Source Analysis. Continuous flow data are not available for other parts of the watershed. In order to estimate mercury loads from all areas, flow was estimated at each sampling site based on the relative size of the drainage area to the drainage area at the gauge. Flow records at the stream gauge and estimated flow are presented in Table A.1. Daily average flow graphs in Figure A.1 show annual flow patterns in Sulphur Creek over the four years of record.

Table A.1 Estimated Flow at Sampling Sites Based Relative Area to USGS Stream Gauge Recorded Data

Site	Area (miles ²)	Percentage of Area to Gauge	Water Year Flow (acre-feet/year)			
			2000	2001	2002	2003
SC-01 (USGS Stream Gauge)	10.1		2254	1439	2839	3307
SC-08	9.9	98%	2209	1410	2782	3240
SC-09	0.39	4%	88	56	111	129
SC-03	8.8	87%	1963	1253	2473	2880
SC-04	0.45	5%	106	68	133	155
SC-05	0.06	0.6%	14	9	17	20
SC-06	8.4	83%	1875	1197	2362	2751
SC-07	8	79%	1785	1140	2248	2619
SC-23	0.73	7%	162	104	204	238
SC-22	0.59	6%	131	83	165	192
SC-20	0.27	3%	61	39	77	89
SC-21	0.47	5%	106	68	133	155

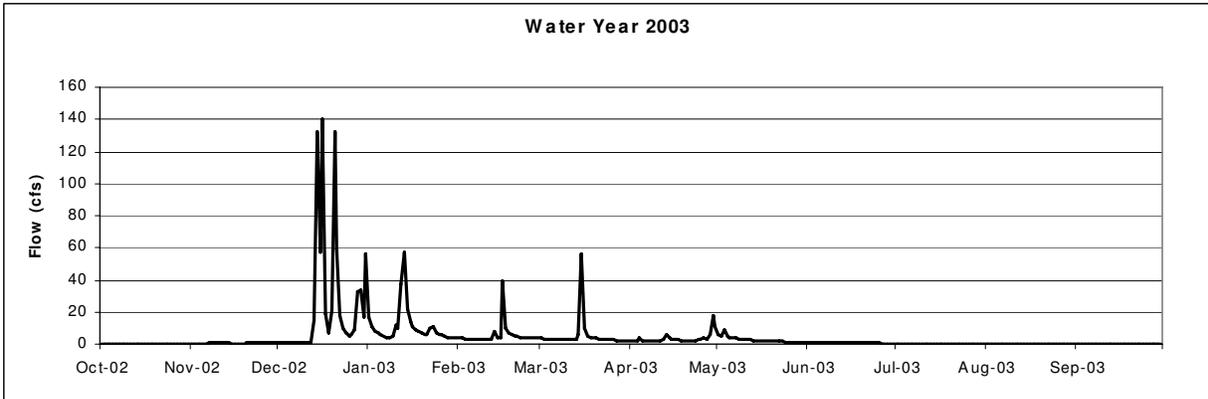
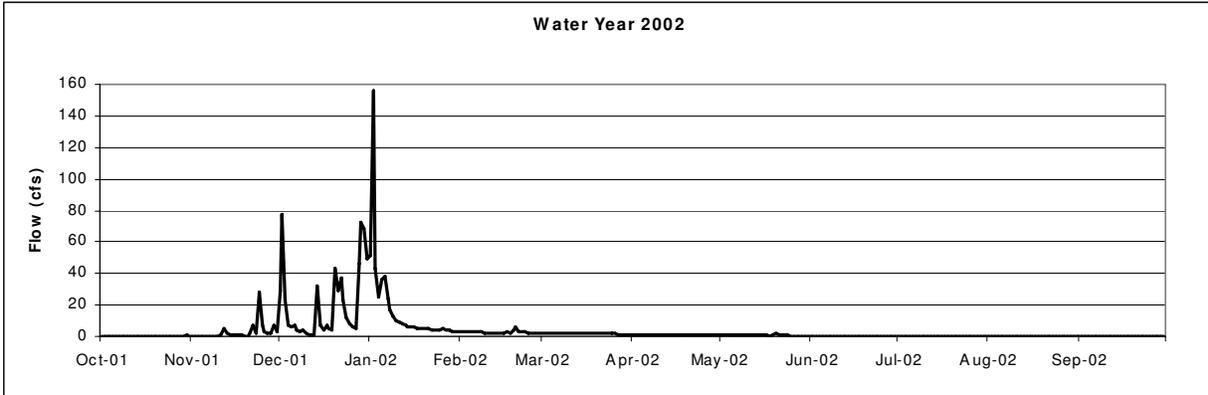
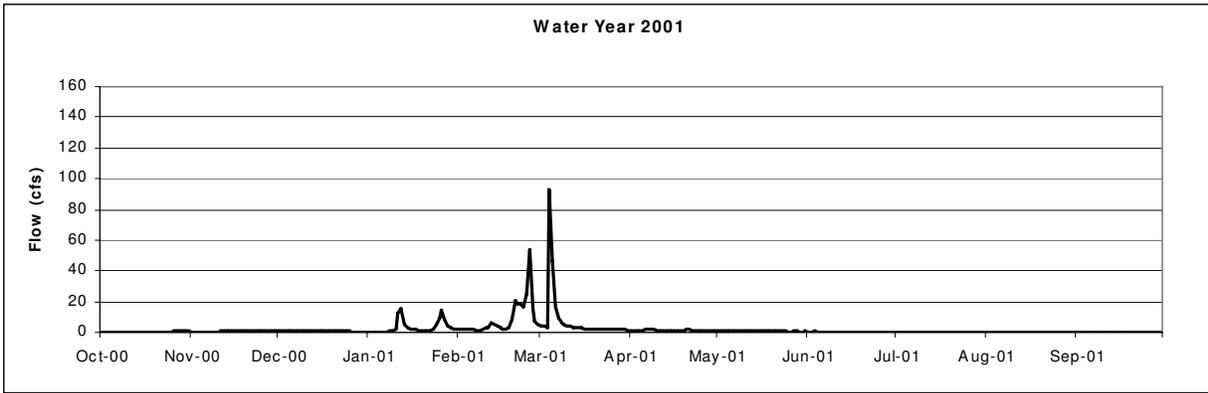
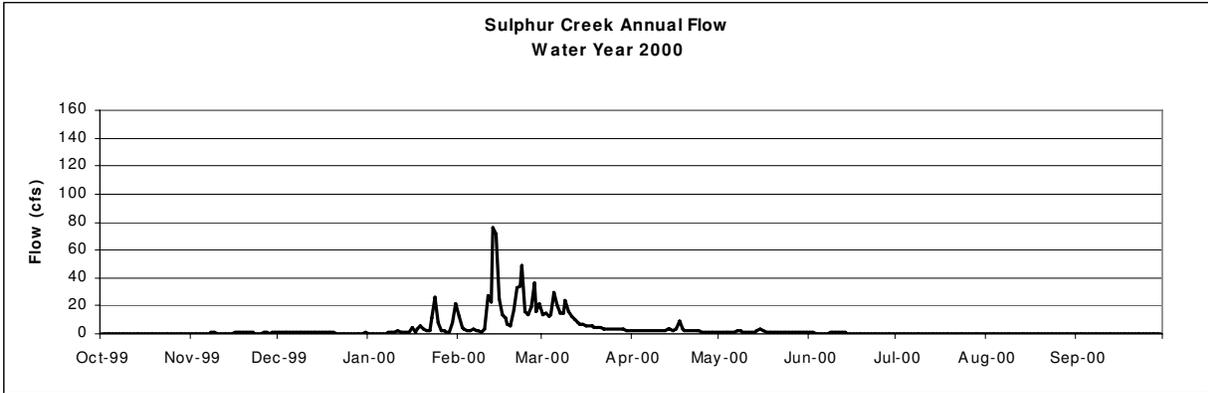


Figure A.1 Daily average flow (cfs) at the USGS stream gauge for four water years.

APPENDIX B. SULPHUR CREEK WATERSHED SAMPLING DATA

Sulphur Creek was sampled six different times during storm events to determine mercury loading patterns throughout the watershed (CVRWQB, unpublished data, Slotton, et al. 2004, Suchanek, et al. 2004). Table B.1 lists total mercury, methylmercury, TSS, and Hg/TSS data collected during these sampling events. The mean total mercury values were used in calculating mercury loads in the Source Analysis section (Table 2.2). Figure B.1 shows sampling points during two storm events where samples were collected at peak flows.

Table B.1 Total Mercury, Methylmercury, TSS and Hg/TSS Data

Total Mercury (ng/L)							
Site (Upstream to Downstream)	02-14-00	02-22-01	01/02/02	12-14-03	02-02-04	02-25-04	Mean
SC-20 Upstream Clyde Mine				32	317	128	159
SC-21 Downstream Clyde Mine				76	7229	1466	2924
SC-22 Upstream Elgin Mine				358	21917	3330	8535
SC-23 Downstream Elgin Mine				2506	21878	12629	12338
SC-07 Sulphur Ck u/s West End Mine			987	342	2424	3422	1794
SC-06 Sulphur Ck d/s West End Mine	230	289	806	414	2584	3894	1370
SC-05 Blanck Springs Tributary	1110	2110	635	1949	1308	892	1334
SC-04 Wide Awake Mine Tributary	2450	4300	4950	2727	15243	5376	5841
SC-03 Sulphur Ck d/s Wide Awake & West End	351	374	1340	410	17360	952	3465
SC-09 Empire Mine Tributary		229	137	116	1798	1226	701
SC-08 Sulphur Ck Upstream Wilbur Springs	620	1110	1268	884	12168	6465	3753
SC-01 Sulphur Ck @ USGS Stream Gauge	974	1340	4119	852	12649	3764	3950
Methylmercury (ng/L)							
Site (Upstream to Downstream)	02-14-00	02-22-01	01/02/02	12-14-03	02-02-04	02-25-04	Mean
SC-20				0.31		0.31	0.3
SC-21				0.37		0.81	0.6
SC-22				0.57		0.77	0.7
SC-23				0.27		1.2	0.7
SC-07				0.64		0.89	0.8
SC-06		0.50		0.68		1.19	0.8
SC-05				0.40		0.74	0.6
SC-04				1.8		0.75	1.3
SC-03				0.76		1.94	1.4
SC-09				0.45		0.86	0.7
SC-08				0.83		1.63	1.2
SC-01	0.48	0.49		0.17		1.93	0.8

TSS (mg/L)							
	02-14-00	02-22-01	01/02/02	12-14-03	02-02-04	02-25-04	Mean
SC-20				1	229	173	134
SC-21				1.1	242	145	129
SC-22				2.8	100	120	74
SC-23				8	95	118	74
SC-07			349	20	647	1100	529
SC-06		15	367	32	720	1270	481
SC-05		135	3170	68	663	1020	1011
SC-04		26	1100	21	760	1125	606
SC-03		22	440	17	1480	820	556
SC-09			25	3.0	642	540	303
SC-08		43	325	13	550	850	356
SC-01	115	56	396	12	590	618	298

Hg/TSS (mg/kg)							
	02-14-00	02-22-01	01/02/02	12-14-03	02-02-04	02-25-04	Mean
SC-20				32	1.4	0.7	11
SC-21				70	30	10	37
SC-22				130	219	28	126
SC-23				313	229	107	217
SC-07			2.8	17	3.7	3.1	6.7
SC-06		19	2.2	13	3.6	3.1	8.2
SC-05		16	0.2	29	2.0	0.9	9.4
SC-04		165	4.5	130	20	4.8	65
SC-03		17	3.0	24	12	1.2	11
SC-09			5.5	39	2.8	2.3	12
SC-08		26	3.9	66	22	7.6	25
SC-01	8.5	24	10	71	21	6.1	24

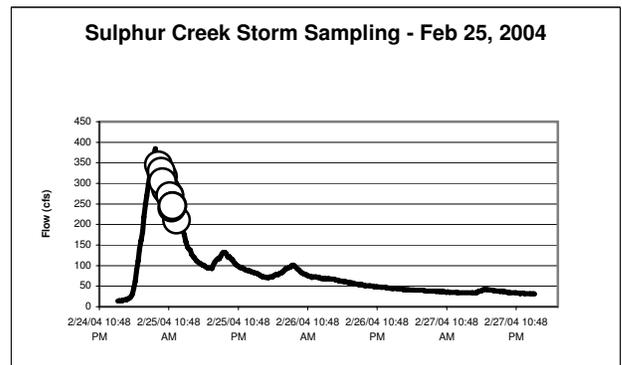
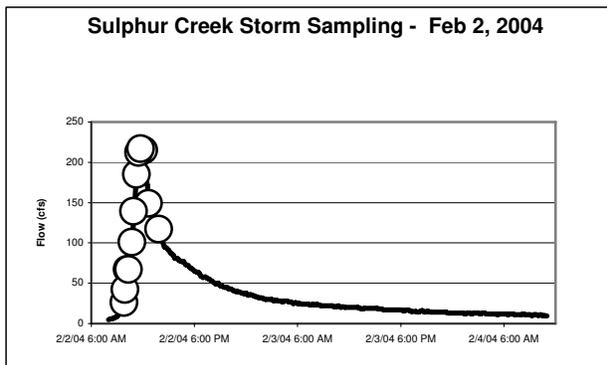


Figure B.1 Watershed wide samples collected in Sulphur Creek during two storm events. White circles indicate samples collected from upstream to downstream during each event.

APPENDIX D. GEOTHERMAL SPRING DATA

Table D.1 provides the raw data for water samples collected at the geothermal springs that flow to Sulphur Creek. Constituents measured at the gauge include total mercury, methylmercury, and TSS.

Table D.1 Data Collected at Sulphur Creek Geothermal Springs

Project Code ^a	Spring	Date	THg (ng/L)	MeHg (ng/L)	TSS (mg/L)	Average Flow (cfs)
Goff2001	Elgin	05/24/94	11,000			0.015
Goff2001	Blanck Hot Spring	05/22/94	6,900			0.008
Goff2001	Jones Fountain of Life	05/23/94	22,000			0.012
CALFED5A	Jones Fountain of Life	02/14/00	24,300			0.012
CALFED5A	Jones Fountain of Life	02/22/01	33,600	20.4	46	0.012
CVRWQCB04	Jones Fountain of Life	02/02/04	26,668		16.93	0.012
CVRWQCB04	Jones Fountain of Life	02/25/04		13.5		0.012
Goff2001	Elbow Hot Spring	05/23/94	61,000			0.0003
CALFED5A	Wilbur Springs	02/22/01	3,460	3.73	5	0.047
CALFED5A	Wilbur Springs	02/22/01	3,970	1.28	12	0.047
Goff2001	Wilbur Springs	05/21/94	6,700			0.047
CALFED5A	Wilbur Springs	02/22/01	7,250	2.01	6	0.047

(a) CALFED5A - Suchanek, et al, 2004
 CVRWQCB 04 – Samples collected by Central Valley Water Board Staff in 2004
 Goff2001 – Goff et al, 2001

APPENDIX E. ATMOSPHERIC DEPOSITION LOAD ESTIMATES

Atmospheric input is the wet and dry deposition falling directly to water surfaces and indirect deposition on the terrestrial watershed with subsequent runoff during storms of a portion of the deposited mercury.

Direct Deposition to Water Surface

Equation E.1 was used to determine an annual direct deposition rate for mercury on surface water in Sulphur Creek:

$$(E.1) \quad Dt = (CwPyA)(1+Kd)$$

Dt = Total annual mercury deposition to Sulphur Creek (kg/yr)

Cw = Concentration of mercury in precipitation (ng/L)

Py = Annual precipitation at Sulphur Creek (0.682 meters/yr)

A = Surface water area of Sulphur Creek (estimate 17200 meters²)

Kd = Dry deposition coefficient (ratio of dry to wet deposition; assumed to be 1.0)

Direct wet atmospheric loads were calculated using both a lower and an upper estimate of mercury concentrations in rain in California as no information has been collected in Sulphur Creek. The smaller value of 3.9 ng/L in Table E-1 is the average concentration measured in rain between 1998 and 1999 at Covelo, California. Covelo is located about a hundred miles north of San Francisco in the Coast range in Mendocino County. The site is part of the National Mercury Deposition Network (NADP, 2000a,b) and is believed to represent mercury concentrations in air masses blowing on shore off the North Pacific Ocean. The upper value of 8.0 ng/L is the average concentration from three locations in the San Francisco Bay Area between September 1999 and August 2000 (SFEI, 2001).

Dry atmospheric deposition data are not available; therefore it was estimated as a percentage of wet deposition (SFEI, 2001; NADP, 2000a). Dry deposition was calculated assuming it was equal to the wet deposition value (Table E-1).

Direct deposition of mercury on the surface of Sulphur Creek was estimated to be 0.09 to 0.19 g/yr. Direct atmospheric deposition on Sulphur Creek accounts for less than 0.1 percent of the total annual mercury load carried in the water body.

Mine waste, geothermal sources, or disturbed rock that is naturally enriched with mercury from Sulphur Creek may emit mercury to the atmosphere, but this value is not known. Based on measurements of mercury fluxing from soil at 22 locations at the Sulphur Bank Mercury Mine (SBMM) in nearby Clear Lake, Gustin and colleagues estimated an annual flux of 6.5 kg mercury from the mine site (Gustin *et al.*, 2000). The flux estimates were of mercury emitted from the soil; levels of redeposition were not measured. Comparable estimates of the amount of emitted mercury that redeposits in the Sulphur Creek watershed have not been made. Mercury fluxing

from the soil may be in the form of elemental mercury, which is relatively stable and can travel long distances in air, or reactive gaseous mercury, which is more likely to be deposited soon after emission (Gustin *et al.*, 2000). Predominant westerly winds may transport mercury to Sulphur Creek from flux at the SBMM in nearby Clear Lake.

Table E.1 Atmospheric Deposition of Mercury to Surface of Sulphur Creek

Wet Deposition Hg Concentration (ng/L) (a,b)	Average Precipitation (m/yr) (c)	Area of Sulphur Creek (m ²)	Annual Wet Hg Deposition (g/yr)
Lower limit wet 3.9	0.682	17200	0.046
Upper limit wet 8.0	0.682	17200	0.094
Annual Wet Hg Deposition (g/yr)	Dry Deposition Percent of Wet Deposition	Total Annual Hg Deposition Wet and Dry (g/yr)	
Lower limit wet 0.046	100%	0.09	
Upper limit wet 0.094	100%	0.19	

- (a) Lower limit of 3.85 ng/L is average wet deposition recorded by the National Mercury Deposition Network at its Covelo, CA station (NADP, 2000a).
- (b) Upper limit of 8.0 ng/L is average wet deposition at three stations in San Francisco Bay Area (SFEI, 2001b).
- (c) Measured at the Indian Valley Reservoir rain gauge operated by DWR.

Loss of mercury by volatilization from the Sulphur Creek water column to the atmosphere has not been estimated. Elemental mercury (Hg⁰) is able to volatilize to the atmosphere. Rate of loss depends upon temperature and concentrations of elemental mercury in the water column and atmosphere. Mercury flux to the atmosphere from Sulphur Creek is considered insignificant particularly since the creek is largely dry for half the year.

Indirect Deposition of Atmospheric Mercury to Watershed and Transport in Runoff

To estimate the amount of mercury from the atmosphere to the watershed that reaches Sulphur Creek, staff applied the rates of mercury deposition and average annual precipitation described above to the area of the entire Sulphur Creek watershed. The watershed area of 6543 acres is estimated to receive 70-144 g/year of mercury from the atmosphere. Assuming 10% of the terrestrial load is transported into waterways (Dolan *et al.*, 1993; SFEI, 2000) the indirect atmospheric contribution to loads in Sulphur Creek is 7-14 g/year.

Table E.2. Indirect Atmospheric Deposition of Mercury to Sulphur Creek

Hg in rainfall, ng/L	Surface area of watershed, m ²	Annual rainfall, m/year	Wet deposition to watershed area, g/year	Wet Plus Dry Deposition to watershed area (rate of wet = rate of dry), g/yr	Portion of atmospheric Hg deposited to watershed entering creek in runoff	Deposited mercury entering creek in runoff (10% of total atmospheric deposit), g/yr
3.9	26480000	0.682	70	140	0.1	14.0
8.0	26480000	0.682	144	288	0.1	28.8

**APPENDIX F. TOTAL MERCURY, METHYLMERCURY, TSS, AND HG/TSS
CONCENTRATIONS IN WATER SAMPLES COLLECTED AT THE USGS STREAM
GAUGE**

Table F.1 provides the raw data for water samples collected at the USGS stream gauge, upstream of the mouth of Sulphur Creek. Total mercury concentrations and flow were used to develop a regression relationship (Figure F.1) to calculate flow-weighted concentrations to better estimate loads exported to Bear Creek. Total mercury and TSS were also used to develop Hg/TSS ratios for identifying mercury sources. Table F.2 summarizes the data. Data collected using the Sigma Autosampler are not included.

Project Code ^a	Date	THg (ng/L)	MeHg (ng/L)	TSS (mg/L)	Hg/TSS (mg/kg)	Flow (cfs)
Goff2001	5/22/1994	1000				
CVRWQCB	1/26/1997	5316		320	16.6	51.7 (b)
CVRWQCB	6/11/1997	245				
CVRWQCB	2/2/1998	8402		510	16.5	11.9 (b)
CVRWQCB	2/16/1998	1965		140	14	26.2 (b)
CALFED5B	1/31/2000	1560	2.46	49.5	31.5	22
CALFED5B	2/14/2000	974	0.48	114.7	8.5	72
CalFED1C	2/27/2000	542	0.33			38.1
CALFED5B	3/2/2000	376	0.22	22	17.1	15
CalFED1C	3/15/2000	528	0.06			7.1
CALFED5B	4/17/2000	430	0.66	14.1	30.5	9.3
CALFED5B	6/14/2000	676	0.76	10.1	66.7	0.5
CALFED5B	8/10/2000	690	4.04	59.4	11.6	0.2
CALFED5B	10/11/2000	676	1.57	13.9	48.5	0.5
CALFED5B	11/7/2000	1320	1.3	4.2	312.1	0.41
CALFED5B	1/11/2001	3070	0.92	55.5	55.3	6.3
CALFED5B	2/13/2001	906	0.41	7.8	116.3	5
CalFED1C	2/20/2001	685	0.492			20.8
CALFED5A	2/22/2001	1340	0.489	56	23.9	19
CALFED5B	5/3/2001	557	0.15	10.1	55.3	0.9
CALFED5B	7/12/2001	1180	18.2	88.6	13.3	0.2
CALFED5B	8/23/2001	1051	20.6	65.1	16.1	0.2
CVRWQCB01	11/20/2001	1768		4.6	384.3	0.48
CVRWQCB02	1/2/2002	4119		396	10.4	156
CVRWQCB03	3/15/2003	1137		162.4	7	110.9
CVRWQCB03	12/14/2003	852	0.17	12	71	26.1
CVRWQCB03	12/29/2003	2097	0.95	151.7	13.8	90
CVRWQCB04	2/2/2004	12649		589.5	21.5	117
CVRWQCB04	2/3/2004	425	0.28	11.3	37.8	20
CVRWQCB04	2/16/2004 (c)	16411	2.54	1262	13	155
CVRWQCB04	2/16/2004 (c)	13148	3.05	1372	9.6	335
CVRWQCB04	2/17/2004	8574	1.1	497.5	17.2	191
CVRWQCB04	2/25/2004	3764	1.93	617.9	6.1	220
CVRWQCB04	3/24/2004	511	0.18	6	85.2	5.5
CVRWQCB04	4/28/2004	303	0.44	18.7	16.2	2.2
CVRWQCB04	6/9/2004	245	0.36	6.4	38.2	0.63

Notes for Table F.1 Data Collected at the USGS Stream Gauge

- (a). CALFED1C – Domagalski et al. 2004
 CALFED5A - Suchanek, et al, 2004
 CALFED5B - Slotton, et al, 2004
 CVRWQCB – Foe and Croyle, 1998
 CVRWQCB 01 – 04 – Samples collected by Central Valley Water Board Staff between years 2001 and 2004
 Goff2001 – Goff et al, 2001
- (b). Flows for the 1997 and 1998 samples were estimated with a hand-held flow meter as the gauge was not yet present. Mercury data from these dates were not used for target calculations.
- (c). On 2/16/04, samples were collected at noon and at 3 :00 pm.

Table F.2 Summary Data for Water Samples Collected at the USGS Stream Gauge

	THg (ng/L)	MeHg (ng/L)	TSS (mg/L)	Hg/TSS (mg/kg)	Flow (cfs)
Average	2890	2	214	51.1	53.4
Minimum	245	0.1	4	6.1	0.2
Median	1094	1	56	17.2	17
Maximum	16411	21	1372	384	335
Count	34	27	31	31	34

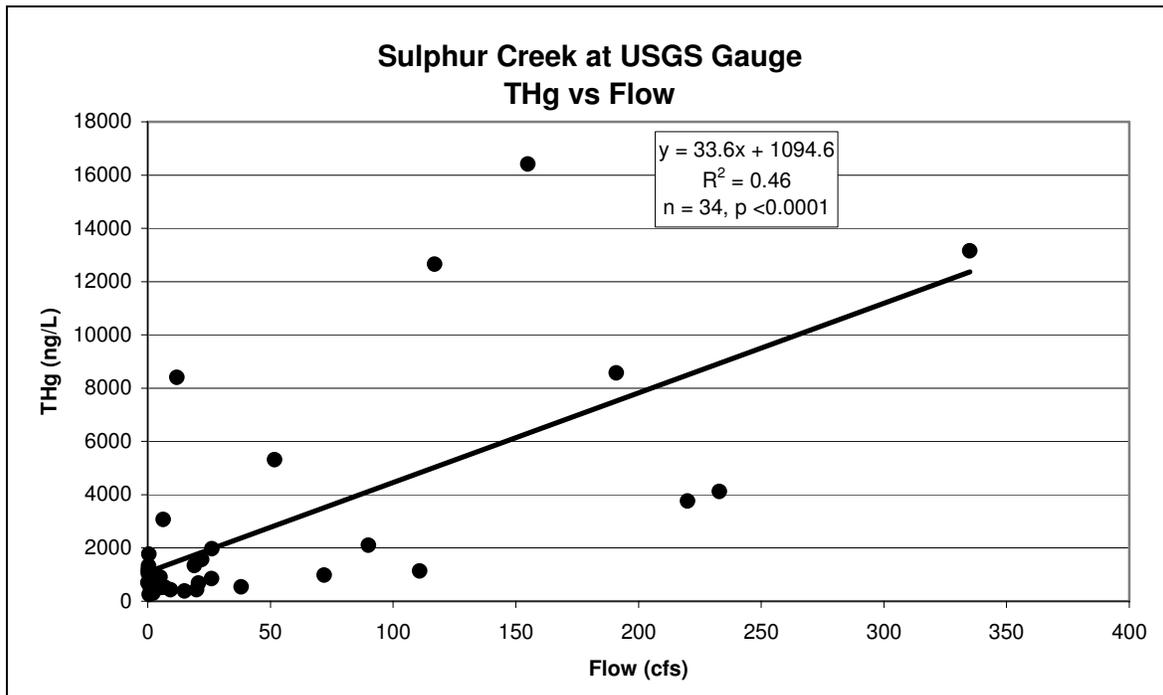


Figure F.1 Mercury concentration and flow relationship at the Sulphur Creek flow gauge

APPENDIX G. SIGMA AUTOSAMPLER DATA

Staff set up a Sigma Autosampler at the USGS stream gauge to collect water samples every ninety minutes during the storm event between February 25th and 26th, 2004. The Autosampler was deployed at noon on the 25th and retrieved at noon on the 26th. Samples were collected in 1-Liter plastic bottles in the Autosampler. Staff aliquoted a total mercury and TSS sample from each bottle using clean hands techniques. Loads were estimated for each sample using the flow recorded every 15 minutes at the USGS stream gauge. Figures G.1 through G.6 show the relationships of total mercury and TSS to flow.

Table G.1 Sigma Autosampler Data

Sample #	Date	Time	Flow (cfs)	THg (ng/L)	Hg Load (g/hr)	TSS (mg/L)	Hg/TSS (mg/kg)
1	02/25/04	12:00 AM	14	231	0.3	2.75	83.9
2	02/25/04	1:30 AM	14	299	0.4	1.75	170.7
3	02/25/04	3:00 AM	16	368	0.6	14.5	25.4
4	02/25/04	4:30 AM	31	2373	7.5	104.8	22.6
5	02/25/04	6:00 AM	161	8074	133	1305	6.2
6	02/25/04	7:30 AM	316	6925	223	1390	5.0
7	02/25/04	9:00 AM	345	9510	335	1344	7.1
8	02/25/04	10:30 AM	280	4591	131	1081	4.2
9	02/25/04	12:00 PM	220	2337	52	538.9	4.3
10	02/25/04	1:30 PM	175	3036	54	350	8.7
11	02/25/04	3:00 PM	122	1714	21	295	5.8
13	02/25/04	6:00 PM	94	904	8.7	142	6.4
14	02/25/04	7:30 PM	117	2543	30	375	6.8
15	02/25/04	9:00 PM	121	1438	18	284.4	5.1
17	02/26/04	12:00 AM	90	865	7.9	153.1	5.6
19	02/26/04	3:00 AM	73	848	6.3	111	7.6
21	02/26/04	4:30 AM	82	849	7.1	117	7.3
22	02/26/04	6:00 AM	95	797	7.7	173	4.6
24	02/26/04	7:30 AM	78	631	5.0	114.4	5.5
		Min	14	231	0.3	1.8	4.2
		Avg	129	2544	55	416	21
		Max	345	9510	335	1390	171

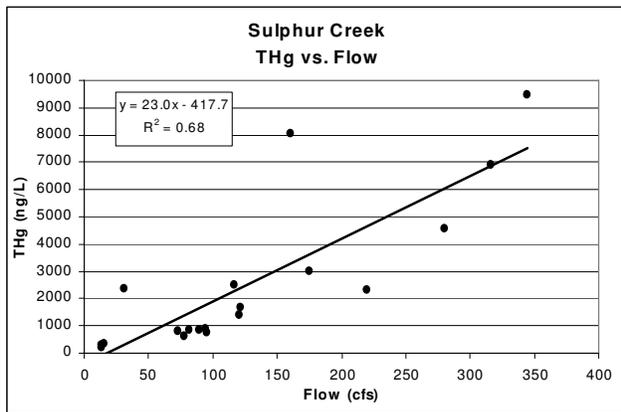


Figure G.1 Total mercury and flow relationship

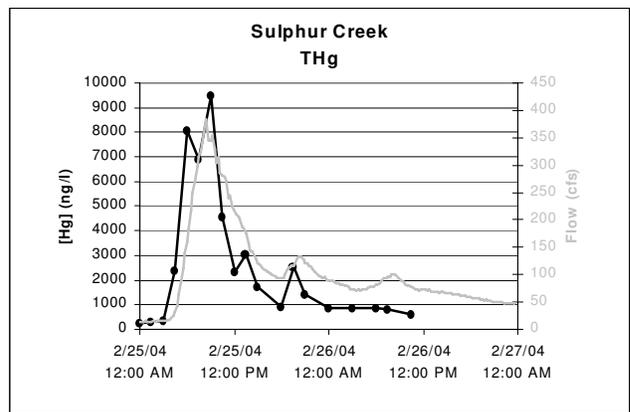


Figure G.2 Total mercury concentrations over time

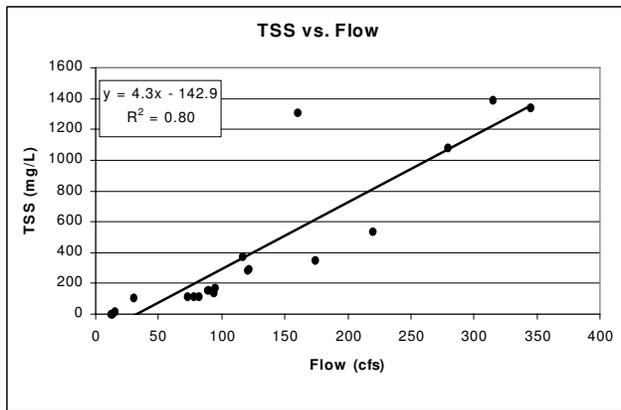


Figure G.3 TSS concentration and flow relationship

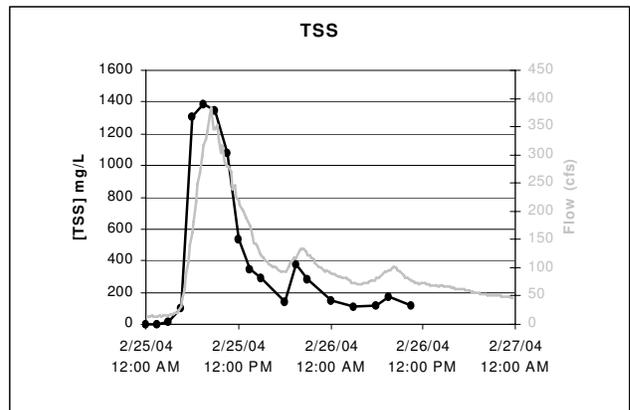


Figure G.4 TSS concentrations over time

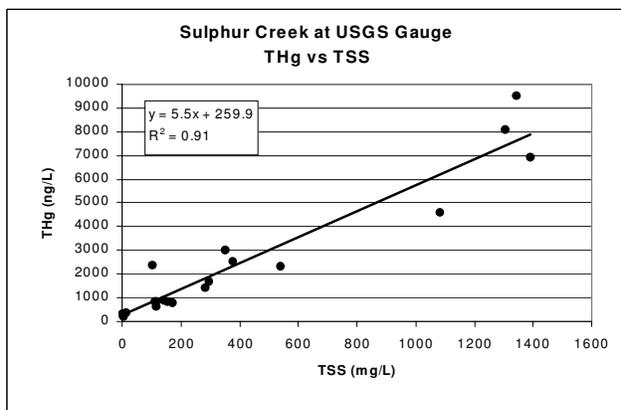


Figure G.5 Autosampler THg and TSS relationship

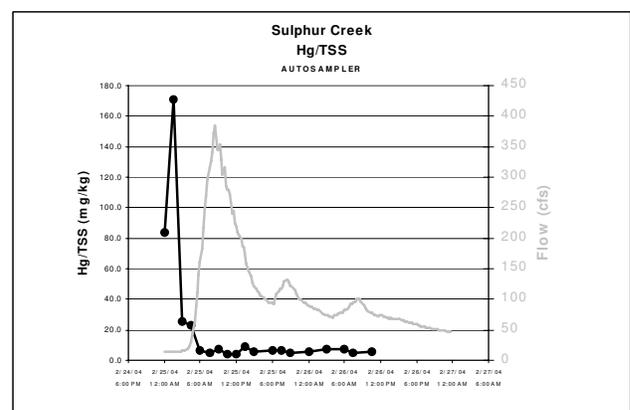


Figure G.6 Hg/TSS concentrations over time

APPENDIX H. EVIDENCE OF IMPAIRMENT FOR PLACEMENT ON THE CLEAN WATER ACT 303(d) LIST

The following information comes from a fact sheet prepared by Central Valley Water Board staff for waterbodies and pollutants identified on the 1998 Clean Water Act 303(d) List of Impaired Water Bodies. Sulphur Creek was placed on the 303(d) List in 1994. Water quality data indicated that Sulphur Creek was impaired by mercury. In addition, historical records of mercury mining and visual inspections of the mines and discharges prompted the listing. Buer and colleagues described the Manzanita Mine area in the lower Sulphur Creek as having a “moderate rank” regarding likely effects on receiving water quality, in comparison with other inactive mines in the Central Valley.

1. Initial Water Quality Data

Water samples were collected from Sulphur Creek in 1978 and 1989 (Buer *et al*, 1979; Montoya and Pan, 1992). All samples were collected within the lower Sulphur Creek watershed, downstream of Schoolhouse Canyon.

Buer, Phillippe, and Pinkos collected samples from Manzanita Mine area and Sulphur Creek on 15 May 1978 for the Central Valley Water Board (Buer *et al*, 1979).

Sample Location	Hg, ng/L	Flow, cfs
Sulphur Creek downstream of Manzanita Mine	3,400	2-5
Unnamed creek 0.5 mile south of Manzanita Mine	12,400	0.003
Manzanita Mine discharge	32,100	Not available

Montoya and Pan conducted a water quality survey of mine drainage in the Sacramento River Basin (1992). They collected water samples from Sulphur Creek below Central, Empire, Manzanita, and Wide Awake Mines on 2 August 1989. Elgin Mine, the only other mine in the Sulphur Creek watershed that was identified in the report, was not visited.

Sample Location	Hg, ng/L	Flow, cfs
Sulphur Creek downstream of lower watershed mines	less than detection limit of 200 ng/L	4.7

2. Data Collected Between Time of Original Listing and the 1998 Update of the 303(d) List

Water. Additional water samples were collected in 1997 and 1998 (Foe and Croyle, 1998). Samples were collected in Sulphur Creek about 100 yards upstream of confluence with Bear Creek.

Sample Date	Unfiltered Hg, ng/L	Filtered Hg, ng/L
1-26-97	5,316	52
2-2-98	11,421	76
2-2-98 field replicate	8,401	Not available
2-16-98	1,964	Not available

Invertebrates. Native, in-stream invertebrates have been shown to give an accurate reflection the mercury levels in California streams and rivers (Slotton *et al*, 1995). Because they incorporate mercury into their bodies throughout their lifetime and do not tend to migrate (as many fish do), they indicate the amount of mercury in the specific waterbody over a long period of time (Slotton *et al*, 1996). Macro-invertebrate samples collected from Sulfur Creek during the spring of 1996 contained mercury concentrations ranging from 1.17 to 2.69 micrograms per gram ($\mu\text{g/g}$) (parts per million [ppm]). On Bear Creek, immediately upstream of the Sulfur Creek – Bear Creek confluence, macroinvertebrate samples exhibited dramatically lower mercury concentrations ranging from 0.18 to 0.39 ppm (Slotton *et al.*, 1997). This indicates that Sulfur Creek contains high levels of mercury, which is accumulating in the invertebrates that are living on the watershed.

References:

Buer, S.M., S.R. Phillippe, and T.R. Pinkos. 1979. *Inventory and Assessment of Water Quality Problems Related to Abandoned and Inactive Mines in the Central Valley Region of California*. California Regional Water Quality Control Board, Central Valley Region Draft Report.

Foe, C. and W. Croyle. 1998. *Mercury Concentrations and Loads from the Sacramento River and from Cache Creek to the Sacramento-San Joaquin Delta Estuary*. California Regional Water Quality Control Board, Central Valley Region Report. June 1998.

Montoya, B. and X. Pan. 1992. *Inactive Mine Drainage in the Sacramento Valley, California*. California Regional Water Quality Control Board, Central Valley Region Report. July 1992.

Slotton, D.G., S.M. Ayers, J.E. Reuter, and C.R. Goldman. 1995. *Gold mining impacts on food chain mercury in northwestern Sierra Nevada streams*. Technical Completion Report for the University of California Resources Center, Project W-816. University of California, Davis, Division of Environmental Studies, August 1995.

Slotton, D.G., S.M. Ayers, J.E. Reuter, and C.R. Goldman. 1997. *Cache Creek Watershed Preliminary Mercury Assessment, Using Benthic Macro-Invertebrates – Final Report, June 1997*. University of California, Davis, Division of Environmental Studies, June 1997.

Slotton DG, SM Ayers, and JE Reuter. 1996. *Marsh Creek Watershed: 1995 Mercury Assessment Project—Final Report March 1996*. Report Prepared for Contra Costa County, March 1996.